
P0751.332NLT

PULSE, PIDC, Ferrite, 20%, 3,300 nH

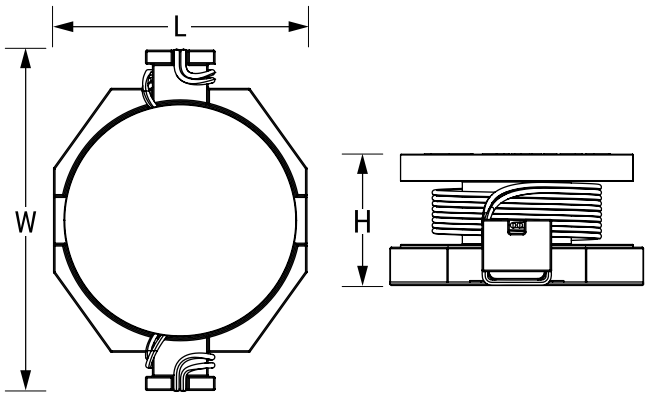

General Information	
Series	PIDC
Style	SMD Drum
Core	Ferrite
Description	P0751/P0752 SMT Unshielded Drum Core Inductor series, up to 6.8A
RoHS	Yes

Dimensions	
L	13mm MAX
W	9.4mm MAX
T	5.5mm MAX

Packaging Specifications	
Packaging	T&R
Packaging Quantity	800

Specifications	
Inductance	3.3 uH
Inductance Tolerance	20%
Rated Current	5.4 Amps (Irms)
Saturation Current	6.4 Amps (Isat)
Temperature Range	-40/+130°C
DC Resistance	18 mOhms
DC Resistance	18 mOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2026 YAGEO