195133-000 ✔ ACTIVE


RAYCHEM

TE Internal #: 195133-000

Roll, 1 Packaging Quantity, 200 °C Temperature (Max), Epoxy Adhesives

View on TE.com >

Wire Protection & Management > Adhesives & Sealants > Epoxy Adhesives

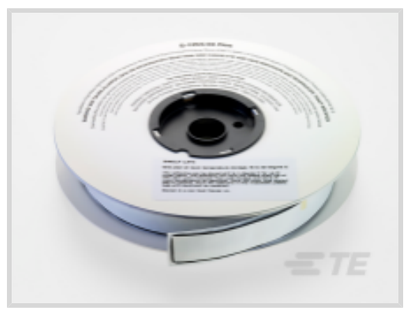

Packaging Method: **Roll**

Packaging Quantity: **1**

Heat Resistance Temperature (Max): **200 °C**

Features

Body Features

Color (Supplied)	Black
Color (Cured)	Black
Material Systems Code	300

Usage Conditions

Heat Resistance Temperature (Max)	200 °C

Packaging Features

Packaging Method	Roll
Packaging Quantity	1

Other

Curing Method	150 °C for 50 min

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241)


	Does not contain REACH SVHC
Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


TE Part # CB7878-000
202E334-780-0

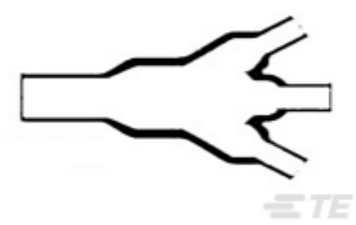

TE Part # 576709-000
462A034-12-30-0



TE Part # 821026-000
562A032-12-0

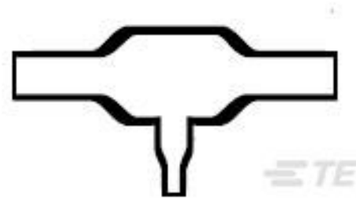

TE Part # 977289-000
322A158-12-0




TE Part # 811231-000
214A011-12-0



TE Part # CAT-R21-73106549
Bulbous Heat Shrink Boots: Lipped, Right Angle



TE Part # 821013-000
342A112-12-0

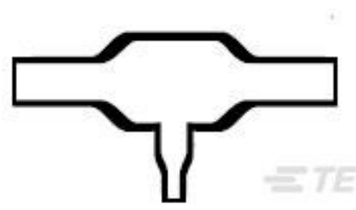

TE Part # 811150-000
322A134-12-0



TE Part # 811180-000
101A011-12-0



TE Part # 821029-000
342A124-12-0



TE Part # 923758-000
362A024-12-0




TE Part # CAT-R21-7310723
Low Profile Heat Shrink Boots: Poly Molded, Lipped, Straight



TE Part # CJ4138-000
203W301-12-G12-0



TE Part # 811352-000
101A021-12-0



TE Part # CAT-R21-731
Heat Shrink Boots: Non Lipped, Straight




TE Part # 821027-000
322A024-12-0



TE Part # 740221-000
101A062-12-0

TE Part # 811024-000
202A021-12-0



TE Part # 811233N004
214A032-12-0




TE Part # 811154-000
382A034-12-0

Customers Also Bought



TE Part #262555-000
264W012-12-0




TE Part #814715-000
222A121-3/42-0



TE Part #1384453002
RAY-103-20.0(50)



TE Part #3693074002
RT555-1/2-0-SP

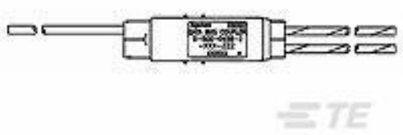

TE Part #575126-000
D-500-0458-2-613-078



TE Part #CAT-R21-7310723
Low Profile Heat Shrink Boots: Poly Molded, Lipped, Straight



TE Part #1-1617069-0
DS9-1W=DS9 DIP SOLID STATE RELAY



TE Part #1618278-1
KC-11=RELAY, VACUUM, SPDT

TE Part #02560551-006
LVDT XS-C 249 MC ASSY

Documents

Product Drawings

S1255-04-3/4X100FT

English

Datasheets & Catalog Pages

Adhesives Selection Guide

English

Product Specifications

Thermofit Adhesive S-1255-04 Flex Fluid Resistant, High Temperature, One Part-Flexible Epoxy

English