
SPECIFICATION CONTROL DRAWING

55PC2212

TITLE	Date	Revision
ONE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLT	1-12-96	B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

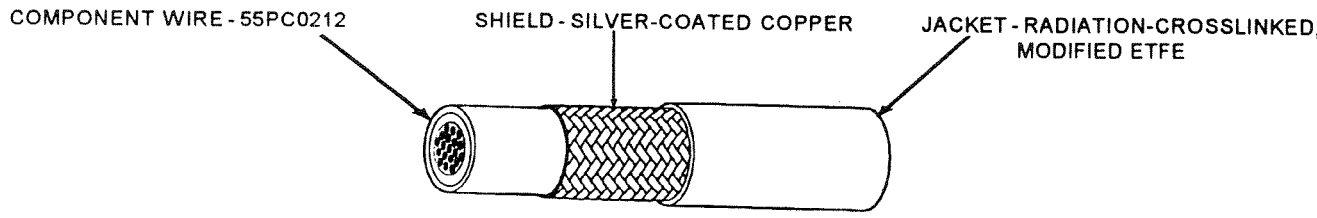

CONSTRUCTION DETAILS									
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC2212-26-*	26	.0015	.0055	.0070	.052	.056	.060	3.25	3.57
55PC2212-24-*	24	.0015	.0055	.0070	.056	.060	.064	3.84	4.18
55PC2212-22-*	22	.0015	.0055	.0070	.062	.066	.070	4.99	5.36
55PC2212-20-*	20	.0015	.0055	.0070	.070	.075	.079	6.81	7.24
55PC2212-18-*	18	.0015	.0055	.0070	.080	.084	.088	9.39	9.92
55PC2212-16-*	16	.0015	.0055	.0070	.087	.092	.096	11.46	12.04
55PC2212-14-*	14	.0015	.0055	.0070	.102	.107	.111	16.58	17.29
55PC2212-12-*	12	.0015	.0060	.0075	.122	.127	.132	24.31	25.19
55PC2212-10-*	10	.0015	.0060	.0075	.145	.151	.156	36.71	38.07

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
Maximum continuous conductor temperature
VOLTAGE RATING: 600 volts (rms)
DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
JACKET COLOR: White preferred
JACKET ELONGATION AND TENSILE STRENGTH:
Elongation, 50% (minimum)
Tensile Strength, 5000 lbf/in² (minimum)
JACKET FLAWS:
Spark Test, 1000 volts (rms), 60 Hz, 100% test
Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)
VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
The "*" in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.
Example: AWG 24, white component wire; white jacket: 55PC2212-24-9-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF [illegible]TAING FOR BID.

Raychem
Raychem Corporation
300 Constitution Drive, Menlo Park, Cal[illegible] 94025
1-800-2 Raychem Fax 1-415-361-6297