
ZONE	LTR	REVISIONS	DATE	APPROVED
	A	CHANGE PER DCO 00817	08-79	AHab
	B	REV PER ECO 12-020967 CT	12-12	KH

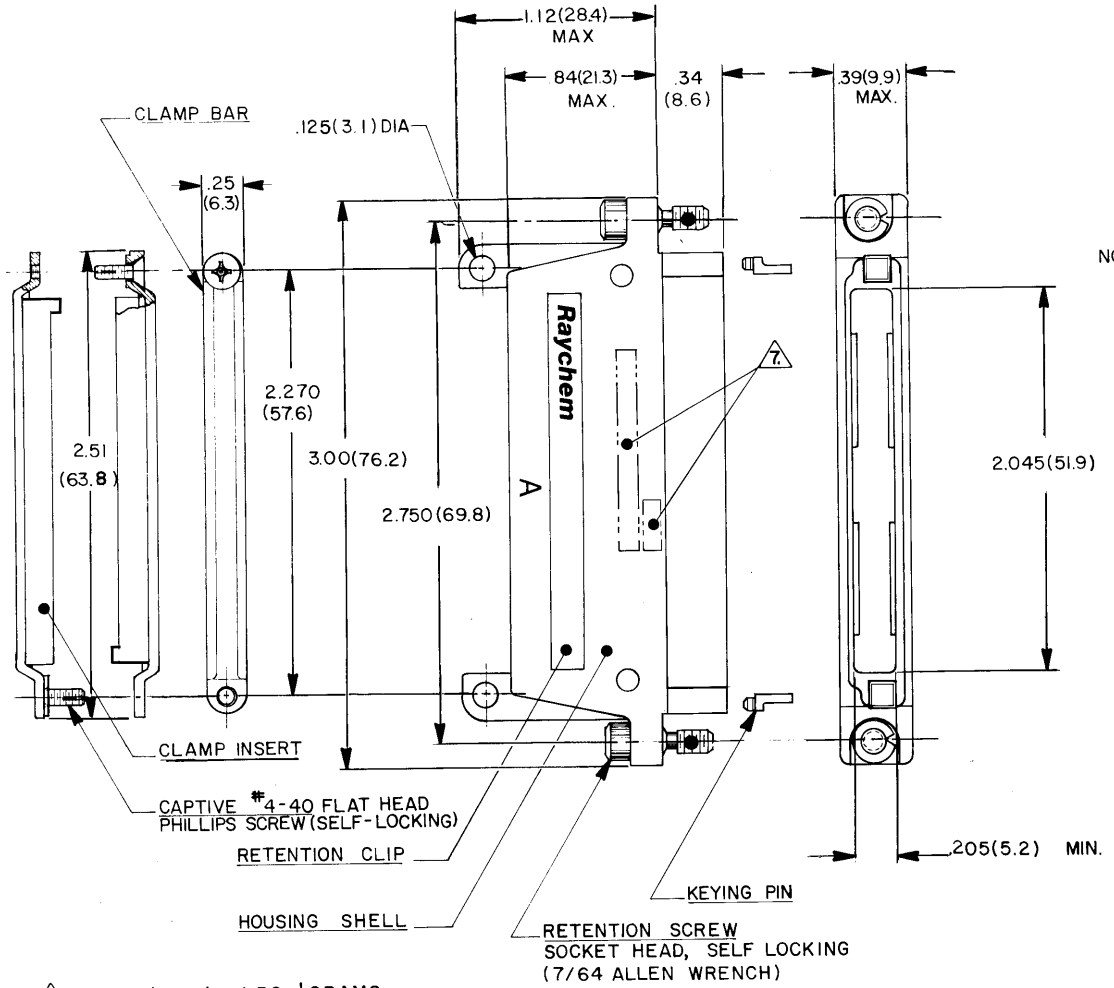

8 WEIGHT (MAX)

LBS.	GRAMS
.0728	33.01

9 CONFIGURATION CONTRON PER ES 71001 APPLIES.

NOTES:

1. MATERIAL:
   - 1-A. HOUSING SHELL; ALUMINUM ALLOY PER QQ-A-591.
   - 1-B. RETENTION SCREW; STAINLESS STEEL PER QQ-S-763 300 SERIES.
   - 1-C. RETENTION CLIP; COPPER ALLOY 172 PER QQ-C-533.
   - 1-D. KEYING PIN; POLYARYLENE THERMOPLASTIC, MOLDED.
   - 1-E. CLAMP BAR; STAINLESS STEEL PER QQ-S-763. 300 SERIES.
   - 1-F. CLAMP INSERT; SILICONE ELASTOMER PER ZZ-R-765.
   - 1-G. CAPTIVE SCREW; STAINLESS STEEL PER QQ-S-763. 300 SERIES.
2. FINISH:
   - 2-A. HOUSING SHELL; NICKEL PLATED PER MIL-C-26074, CLASS 3, GRADE B.
   - 2-B. RETENTION SCREW; PASSIVATED PER QQ-P-35.
   - 2-C. RETENTION CLIP; NICKEL PLATED PER MIL-C-26074, CLASS 2, GRADE B.
   - 2-D. CLAMP BAR; PASSIVATED PER QQ-P-35.
   - 2-E. CAPTIVE SCREW; PASSIVATED PER QQ-P-35.
3. HOUSING MEETS THE REQUIREMENTS OF **Raychem** SPECIFICATION D-6014.
4. FOR MOUNTING/MATING AND KEYING INFORMATION, SEE **Raychem** DRAWING D652-0012.
5. (2) KEYING PINS ARE SUPPLIED NOT INSTALLED WITH EACH PLUG.
6. DUST COVER SUPPLIED INSTALLED WITH EACH PLUG.
7. **Raychem** PART NO. MTC100-YH2-009 AND DATE CODE IS STAMPED APPROXIMATELY AS SHOWN.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE:
.XXX : ± .005 (0.1M.M.)
.XX : ± .02 (0.5M.M)
∠ : ±

DRAWN	S.A.LOPEZ	8/2/79
CHECKED		8-2-79
APPROVED		8-2-79
APPROVED		8-2-79
APPROVED		8-2-79
PROJECT	6448-H008	

Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

TITLE: PLUG HOUSING 2INCH WITH CABLE CLAMP MTC100 SERIES-CONDUCTIVE FINISH

SIZE	CODE IDENT	DWG. NO.
C	NO. 06090	MTC100-YH2-009

WEIGHT 8 | SHEET 1 OF 1

CONFIGURATION CONTROL

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING