SO63-2-55-22-90 ✔ ACTIVE

RAYCHEM

TE Internal #: 021174-000

2.67 mm [.105 in] Expanded Inside, Shrinks To .76 mm [.03 in], Pre-Installed Lead, SolderSleeve Shield Terminators

View on TE.com >

Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): **150 °C [302 °F]**

Expanded Inside Diameter (Min): **2.67 mm [.105 in]**

Recovered Inside Diameter (Max): **.76 mm [.03 in]**

Pre-Installed Lead: **Yes**

Resistance Properties: **Immersion Protection**

Features

Product Type Features

Temperature Indicator	Yes
Interconnect Device Splice Type	Shield Terminator
Temperature Indicator Type	Fusible Ring

Configuration Features

Pre-Installed Lead Type	55A0111
Pre-Installed Lead	Yes

Body Features

Lead Stranding	Stranded
Lead Plating Material	Tin
Lead Color	White/Black

Dimensions

Compatible Jacket Diameter Range	2.65 mm[.105 in]
Product Length	16.5 mm[.65 in]
Shield Outside Diameter (Min)	1.4 mm[.055 in]
Pre-Installed Lead Wire Size	754 CMA
Dielectric Outside Diameter (Max)	.75 mm[.03 in]
Expanded Inside Diameter (Min)	2.67 mm[.105 in]
Recovered Inside Diameter (Max)	.76 mm[.03 in]

Usage Conditions

Operating Temperature (Max)	150 °C[302 °F]
Resistance Properties	Immersion Protection
Wire Temperature (Max)	125 °C

Industry Standards

MIL/NAS Specification (MIL-S-83519, NAS-1747)	No
Government Qualified	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (37% in Solder) **Article Safe Usage Statements:** Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # EG8162-000
HL1920E-230V-EURO


Customers Also Bought



TE Part #094469-000
55A1124-22-9/96-9CS2275




TE Part #882218-000
SO63-5-55-22-90

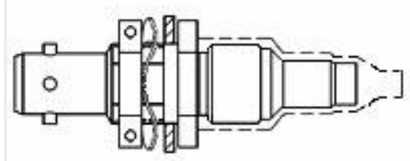


TE Part #638491-000
DK-621-0434-1P




TE Part #816870-000
SO63-4-55-20-90



TE Part #YD369-B99-NP000000
369 9 WAY PANEL MNT REC, NO CONTACTS,PIN




TE Part #34137-3
SOLIS, PARA 16-14 60/40 SN-PB

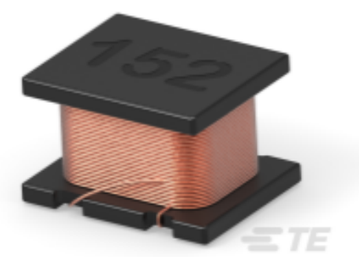

TE Part #1-2176639-7
3627C 322520 560UH 10%

TE Part #73560070-000
JL LVDT M12-50-4114

TE Part #YDTS24T23-35SAV001
RECP ASSY



TE Part #34130-4
SOLIS, PARA 22-16 60/40 SN-PB

Documents

Product Drawings

SO63-2-55-22-90

English

Datasheets & Catalog Pages

1654025_Sec8_B-155_CWT_SO63_S01to03_SO96

English