PT8420-0060-341-1170 ✔ ACTIVE

MEAS | MEAS PT8420

TE Internal #: 04-0981-5080

TE Internal Description: PT8420-0060-341-1170

4 to 20 MA STRING POT TO 60IN

View on TE.com >

Sensors > Position Sensors > Potentiometer Sensors > Cable Actuated Position Sensors > 4 to 20 MA STRING POT TO 60IN



Position Sensor Product Type: **Industrial String Potentiometer**

Full Stroke Range: **1524 mm [60 in]**

Output Signal Type: **4 – 20 mA**

Accuracy: **±.15 % of FS**

Repeatability: **.05 % of FS**

All 4 to 20 MA STRING POT TO 60IN (1021)

Features

Product Type Features

Position Sensor Product Type	Industrial String Potentiometer

Body Features

Case Material	303 Stainless Steel, Stainless Steel

Dimensions

Full Stroke Range	1524 mm[60 in]

Usage Conditions

Accuracy	±.15 % of FS
Operating Temperature Range	-40 – 90 °C[-40 – 194 °F]

Operation/Application

Output Signal Type	4 – 20 mA

Industry Standards

IP Rating	IP68
Hazardous Area Approval	None

Other

Encoder Drive	No
Repeatability	.05 % of FS

PT8420-0060-341-1170

Measuring Cable	.031 Inch Dia Bare Stainless Steel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one (5.3% in 20973981313) Methanone, (diphenylphosphinyl)(2,4,6-trimethylphenyl)- (1% in Component Part) Pb (70% in Component Part) **Article Safe Usage Statements:** Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | MEAS PT8420

PT8420-0060-341-1170



Cable Actuated Position Sensors(1021)


Customers Also Bought



TE Part #3-350980-1
SL156 RECEPTACLE



TE Part #1-480318-0
02P CMNL PLUG HSG F/H NATL

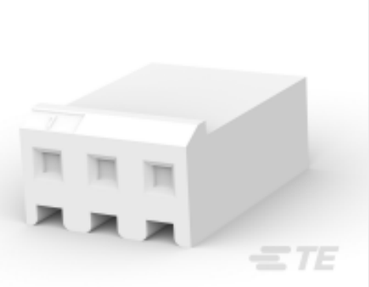

TE Part #CAT-103156-WBHSM
Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156



TE Part #1-770996-3
13P SL 156 HSG W/TABS W/O LR



TE Part #CAT-104CST-RCPHS
Receptacle Housing: 2.54mm, 1 Row, CST-100 II

Documents

Datasheets & Catalog Pages

PT8420

English