
RED INDICATES ORIGINAL


DISK #	DWG SIZE	
E11	C	DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS			105-0130	SH 1
REV	EO	DESCRIPTION	DWN APPROVED	DATE
T	10195	SEE ECO	DKC BMI FQ	3/9/93

DASH NO (8)	MODEL NO	L DIM
-0	TNA2-0	2.165
-U0	UTNA2-0	
-1	TNA2-(5)-(4)	
-U1	UTNA2-(5)-(4)	
-02	TNA3-0	
-U02	UTNA3-0	
-2	TNA3-(5)-(4)	
-U2	UTNA3-(5)-(4)	
-03	TNA4-0	3.238 (4)
-U03	UTNA4-0	
-3	TNA4-(5)-(5)-(5)-(4)	
-U3	UTNA4-(5)-(5)-(5)-(4)	

INCH	MM
.005	0.13
.030	0.76
.380	9.65
.545	13.84
.593	15.06
2.165	54.99
3.238	82.25



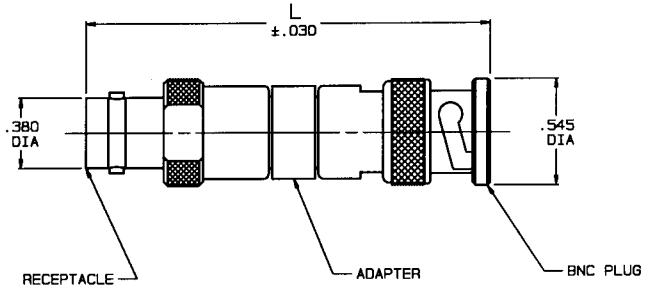

(8) SPECIFY RESISTOR POWER RATING (4) WHEN ORDERING WITH NO RESISTOR (CUSTOMER INSTALLS OWN RESISTOR)

7. 50 & 75 OHM BNC PLUG TO 50 & 75 OHM RECEPTACLE

6. WHEN NO RESISTOR(S) SPECIFIED, PARTS SHOULD BE LOOSELY ASSEMBLED

(5) RESISTANCE VALUE OF EACH RESISTOR (R1,R2,R3) IN OHMS ±1%

(4) A=1/4 W, C=1 W.(WHEN "C" IS SPECIFIED. OVERALL LENGTH INCREASES BY .200 TO 3.438).STANDARD POWER RATING IS 1/2W (NO SUFFIX LETTER). (SUFFIX LETTER TO FIRST DASH NO IN PART NO. AND LAST DASH NO AND MODEL NO

3. FINISH: TFS-1A (NICKEL)

2. ALL DIM ARE IN INCHES


1. EXAMPLE OF COMPLETE PART NO (STANDARD POWER RATING IS 1/2W. FOR 1/4W OR 1W, ADD SUFFIX TO P/N. MODEL NO AS SHOWN BELOW)

105-0130 -2 C 50
BASIC PART NO — DASH NO — (4) — (5)

EXAMPLE OF MODEL NO.

TNA3 - 50 - C
BASIC MODEL NO — RESISTANCE IN OHMS — RESISTOR POWER RATING

SCHEMATIC

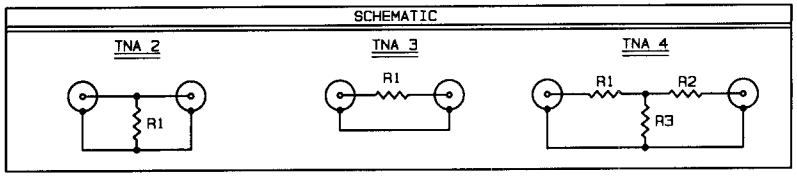

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ± .XXX ± .005 .XXXX± ANGLES±	TROMPETER ELECTRONICS, INC.	U/TNA2/TNA3/TNA4	

DWN	DKC	3-8-93	MATERIAL	CODE IDENT	DRAWING NO.	REV
CHK	BMI	3-8-93	———	14949	105-0130	T
ENGR	—	—				
APPR	FQ	3-8-93	SCALE 2/1	DATE 7-21-70	SHEET 1 OF 2	

NEXT ASSY