
Data sheet

# AP SAK70/35

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

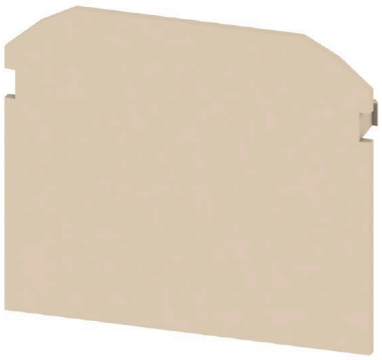

End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

## General ordering data

| | |
|---|---|
| Version | End plate for terminals, beige, Height: 75 mm, Width: 2 mm, V-2, PA 66, Snap-on: Yes |
| Order No. | 0340960000 |
| Type | AP SAK70/35 |
| GTIN (EAN) | 4008190098681 |
| Qty. | 10 items |
| Delivery status | This article will no longer be available in the future. |
| Available until | 2026-06-30T00:00:00+02:00 |

# Data sheet

## AP SAK70/35

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

# Technical data

### Approvals

| | |
|---|---|
| ROHS | Conform |

### Dimensions and weights

| | | | |
|---|---|---|---|
| Depth | 64 mm | Depth (inches) | 2.5197 inch |
| Height | 75 mm | Height (inches) | 2.9527 inch |
| Width | 2 mm | Width (inches) | 0.0787 inch |
| Net weight | 11.07 g | | |

### Temperatures

| | | | |
|---|---|---|---|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -5 °C...40 °C |
| Continuous operating temp., min. | -50 °C | Continuous operating temp., max. | 100 °C |

### Environmental Product Compliance

| | | |
|---|---|---|
| RoHS Compliance Status | Compliant without exemption | |
| REACH SVHC | No SVHC above 0.1 wt% | |
| Product Carbon Footprint | Cradle to gate | 0.093 kg CO2eq. |

### Material data

| | | | |
|---|---|---|---|
| Basic material | PA 66 | Colour | beige |
| UL 94 flammability rating | V-2 | | |

### System specifications

| | |
|---|---|
| Version | End plate |

### Additional technical data

| | | | |
|---|---|---|---|
| Snap-on | Yes | Installation advice | Direct mounting |

### General

| | |
|---|---|
| Installation advice | Direct mounting |

### Classifications

| | | | |
|---|---|---|---|
| ETIM 6.0 | EC000886 | ETIM 7.0 | EC000886 |
| ETIM 8.0 | EC000886 | ETIM 9.0 | EC000886 |
| ETIM 10.0 | EC000886 | ECLASS 9.1 | 27-14-11-33 |
| ECLASS 10.0 | 27-14-11-33 | ECLASS 11.0 | 27-14-11-33 |
| ECLASS 12.0 | 27-14-11-33 | ECLASS 13.0 | 27-25-03-01 |
| ECLASS 14.0 | 27-25-03-01 | ECLASS 15.0 | 27-25-03-01 |