
SAK Series
QVS 2/S SAKT1+2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

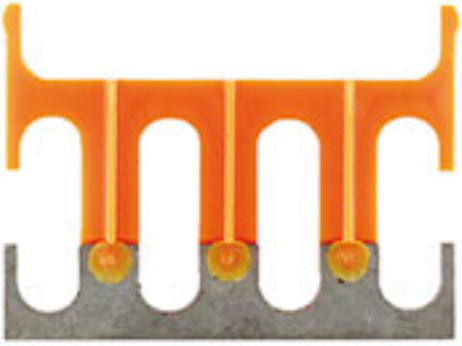

Current and voltage transformer wiring
Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Type	QVS 2/S SAKT1+2
Order No.	0358460000
Version	SAK Series, Cross-connector, Cross-connector, No. of poles: 2
GTIN (EAN)	4008190157937
Qty.	20 pc(s).

SAK Series
QVS 2/S SAKT1+2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Width	15.4 mm	Width (inches)	0.606 inch
Height	26.5 mm	Height (inches)	1.043 inch
Depth	4.5 mm	Depth (inches)	0.177 inch
Net weight	1.15 g		

Temperatures

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C

Material data

Material	PA 66	Colour	Beige
UL 94 flammability rating	V-2		

System specifications

Version	Cross-connector	Mounting rail	none

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Type of fixing	Screwed		

Dimensions

Pitch in mm (P)	12 mm

Classifications

ETIM 3.0	EC000489	ETIM 4.0	EC000489
ETIM 5.0	EC000489	ETIM 6.0	EC000489
UNSPSC	30-21-18-01	eClass 5.1	27-14-11-40
eClass 6.2	27-14-11-40	eClass 7.1	27-14-11-40
eClass 8.1	27-14-11-40	eClass 9.0	27-14-11-40
eClass 9.1	27-14-11-40		

Approvals

ROHS	Conform

Downloads

Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP