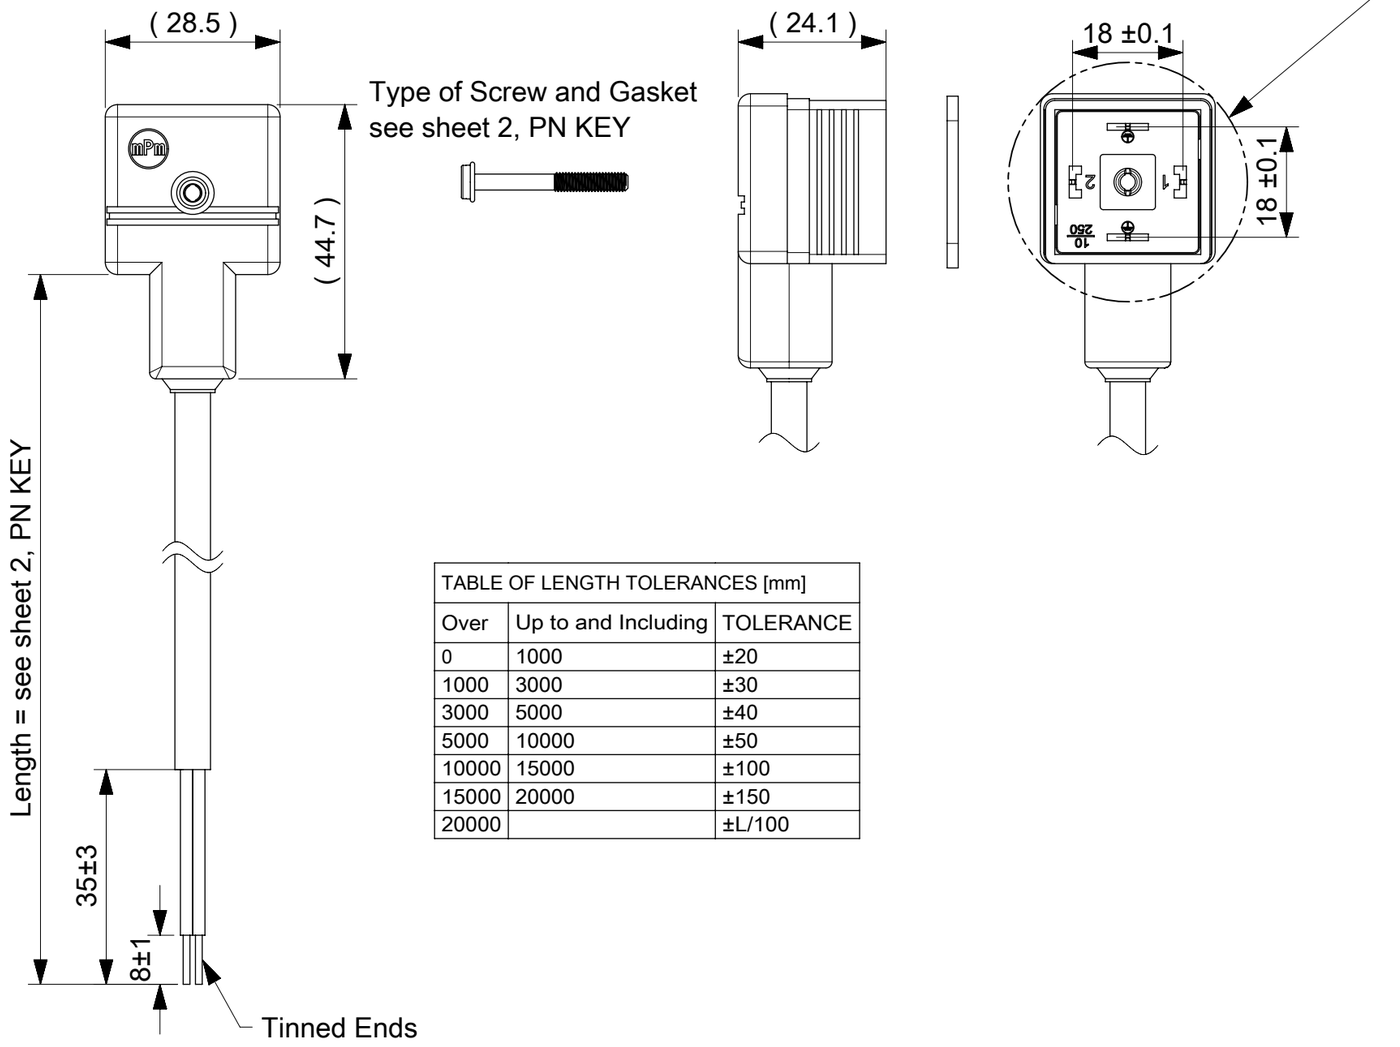


TABLE OF LENGTH TOLERANCES [mm]		
Over	Up to and Including	TOLERANCE
0	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100

INSERT ORIENTATION	
Housing 2 Poles + 2 Earths	Housing 3 Poles + 1 Earth
Earth H6/H12 E151XXXXXX1X	Earth H12 E151XXXXXX2X PIN 3 Not Used
Earth H3/H9 E151XXXXXX4X	Earth H3 E151XXXXXX3X PIN 3 Not Used
	Earth H6 E151XXXXXX6X PIN 3 Not Used
	Earth H9 E151XXXXXX9X PIN 3 Not Used

WIRING CONFIGURATION	
Housing 2 Poles + 2 Earths	Housing 3 Poles + 1 Earth
Brown(or Black 1) — 1 Blue(or Black 2) — 2 Not Used — ⏚ Not Used — ⏚	Brown(or Black 1) — 1 Blue(or Black 2) — 2 Not Used — ⏚ Not Used — 3

Type of Screws and Gaskets

Profiled Gasket	Flat Gasket	Integrated Gasket	Screw M3x25
(□ 29.5) (5.2) (1.8)	(□ 28) (1.8)	(□ 28) (1.8) (9.3)	(25) M 3
			Screw M3x27 + Washer
			(27) M 3 NBR Washer

DOCUMENT STATUS	P1	RELEASE DATE	2024/02/27 15:10:37

FORMAT: master-Sheet-A3
REVISION: J1
DATE: 2021/05/07

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FP = 0

DIVISIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE
mm	1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: SD-121040-007
TRANSFERRED TO ECTR

EC NO: 778417
DRWN: APAWLAK01 2024/02/23
CHK'D: RSILLER 2024/02/27
APPR: RSILLER 2024/02/27

INITIAL REVISION:
DRWN: APAWLAK01 2024/02/23
APPR: RSILLER 2024/02/27

THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 121040

molex

STANDARD E151 DIN FORM A EN 175301-803

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1210400033	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE 1210400033 PDP	GENERAL MARKET	1 OF 2

PN KEY - NUMERICAL CODE (Available parts see PART LIST table. Others parts available upon request).

E	1	5	1	X	X	X	X	X	X	X	X

- **E** — E - Packing without bags
- **1** — Number of wires: 2 - 2 Wires
- **5** — Cable type: See Table
- **1** — Head Colour: G - Grey; N - Black; A - CSA-UL Black; B - CSA-UL Grey
- **X X X** — Cable Length in [cm] Examples: 050 = 50cm; 300 = 300cm; 10K = 1000cm
- **X** — Earth PIN location (see insert orientation table): 1 = Double Earth on H6 & H12; 2 = Earth on H12; 3 = Earth on H3; 4 = Double Earth on H3 & H9; 6 = Earth on H6; 9 = Earth on H9
- **X** — Type of Gasket and Screw (see sheet 1): 1 = NBR Profile Gasket + Fixing Screw M3x25mm; 2 = NBR Flat Gasket + Fixing Screw M3x25mm; 3 = Silicone Profile Gasket + Fixing Screw M3x25mm; 4 = Silicone Flat Gasket + Fixing Screw M3x25mm; P = NBR Integrated Gasket + Fixing Screw with Washer M3x27mm Assembled on Connector; R = NBR Integrated Gasket + Fixing Screw with Washer M3x27mm NOT Assembled on Connector; T = NBR Profile Gasket + Fixing Screw with Washer M3x27mm

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE O.D.	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	SHIELD
A2	2	AWG 20	5.4mm±0.2	PVC BLACK	UL 2661	CSA C22.2	-30°C to +105°C, 10xO.D.	-5°C to +105°C, 15xO.D.	-
A3	2	AWG 18	6.2mm±0.25	PVC BLACK	UL 2661	CSA C22.2	-30°C to +105°C, 10xO.D.	-5°C to +105°C, 15xO.D.	-
B2	2	AWG 20	5.6mm±0.2	PUR BLACK	UL 20668	CSA C22.2	-40°C to +90°C, 5xO.D.	-25°C to +90°C, 10xO.D.	-
B3	2	AWG 18	6.2mm±0.2	PUR BLACK	UL 20668	CSA C22.2	-40°C to +90°C, 5xO.D.	-25°C to +90°C, 10xO.D.	-
I2	2	0.5mm²	5.0mm+0.3	PVC GREY	-	-	-25°C to +70°C, 10xO.D.	-5°C to +70°C, 15xO.D.	-
I4	2	1mm²	7.1mm±0.2	PVC GREY	-	-	-25°C to +70°C, 10xO.D.	-5°C to +70°C, 15xO.D.	-
I6	2	0.35mm²	4.8mm±0.2	PVC GREY	-	-	-20°C to +80°C, 20xO.D.	-5°C to +70°C, 20xO.D.	-
N2	2	0.5mm²	~4.7mm	PVC BLACK	-	-	-40°C to +70°C	-5°C to +70°C	-
N3	2	0.75mm²	~5.9mm	PVC BLACK	-	-	-40°C to +70°C	-5°C to +70°C	-
N4	2	1mm²	~6.1mm	PVC BLACK	-	-	-40°C to +70°C	-5°C to +70°C	-
P2	2	0.5mm²	5.5mm±0.2	PUR BLACK	-	-	-40°C to +90°C, 7.5xO.D.	-15°C to +90°C, 12.5xO.D.	-
P3	2	0.75mm²	6.5mm±0.2	PUR BLACK	-	-	-40°C to +90°C, 7.5xO.D.	-15°C to +90°C, 12.5xO.D.	-
W2	2	0.5mm²	~5.2mm	WSOR BLACK	UL758	-	-40°C to +90°C, 5xO.D.	-25°C to +80°C, 7.5xO.D.	
W3	2	0.75mm²	~6.0mm	WSOR BLACK	UL758	-	-40°C to +90°C, 5xO.D.	-25°C to +80°C, 7.5xO.D.	

Notes:
1. Please see excel sheet 1210400033_PDP for currently configured part numbers.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0; FC = 0; FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: SD-121040-007
TRANSFERRED TO ECTR

EC NO: 778417
DRWN: APAWLAK01 2024/02/23
CHK'D: RSILLER 2024/02/27
APPR: RSILLER 2024/02/27

INITIAL REVISION:
DRWN: APAWLAK01 2024/02/23
APPR: RSILLER 2024/02/27

molex

STANDARD E151 DIN FORM A EN 175301-803

PRODUCT CUSTOMER DRAWING


DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1210400033	PSD	000	A

THIRD ANGLE PROJECTION	DRAWING	SERIES
	A3-SIZE	121040


MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE 1210400033 PDP	GENERAL MARKET	2 OF 2

DOCUMENT STATUS	P1	RELEASE DATE	2024/02/27 15:10:37

FORMAT: master_borders-A3
REVISION: J1
DATE: 2021/05/05

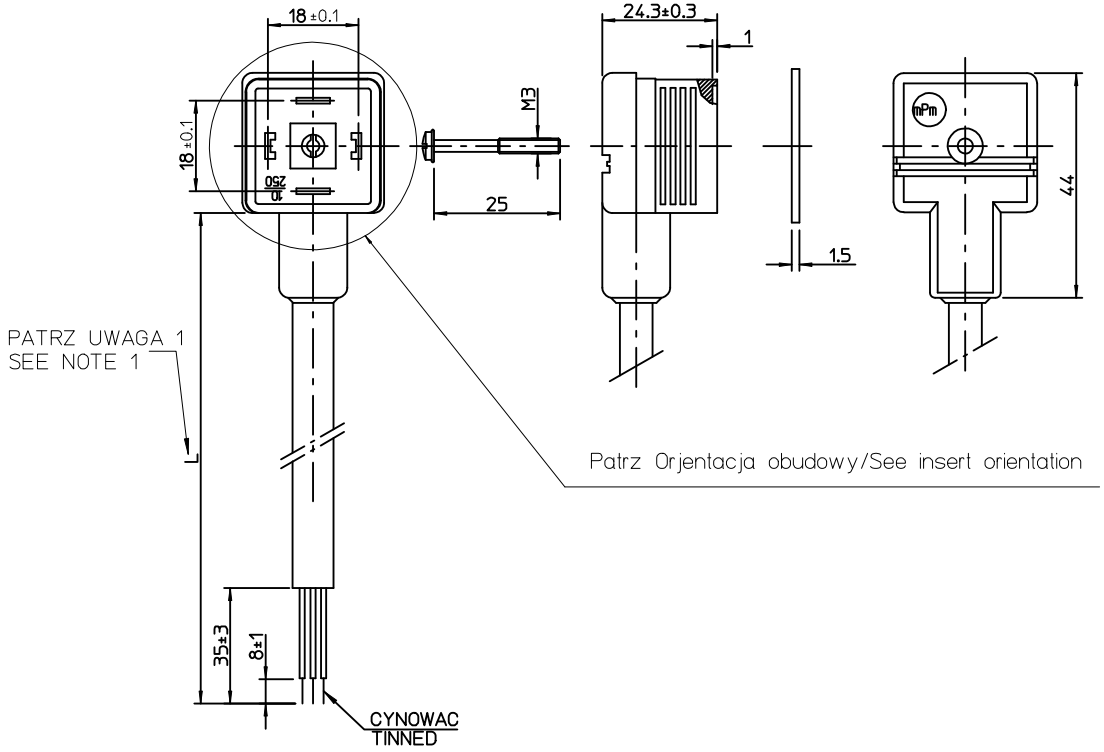

SCHEMAT POLACZEN/WIRING CONFIGURATION



Orjentacja obudowy/Insert orientation

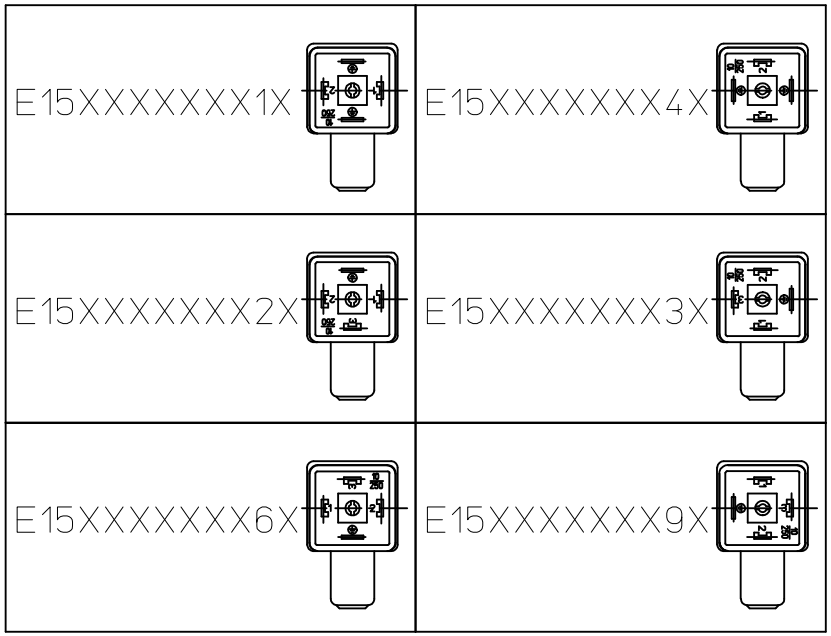


Table of lenght tolerances/ Tablica tolerancji dlugosci mm		
Over/Od	Up to and including/ Do-wlacznie	Tolerance/Tolerancja
100	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100

UWAGI:

1. DLUGOSC PATRZ ARKUSZ 2.

NOTES:

1. LENGHT SEE SHEET 2.

LABEL REMOVED
EC NO: WEU2009-0464 2009/06/24
DRWN:MWOLSZCZAK 2009/06/25
CH'KD:MDABROWSKA 2009/08/04
APPR:GOGRODNIK
DESCRIPTION
REV
A1

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ±---°		


DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
FIRST ANGLE PROJECTION

DRAWN BY: MLEVYTSKYY DATE: 2009/01/21
CHECKED BY: MDABROWSKA DATE: 2009/01/21
APPROVED BY: MWOLSZCZAK DATE: 2009/01/21
MATERIAL NO.: SEE DRAWING

TITLE: MPM E151XXXXXXX
MOLEX INCORPORATED
DOCUMENT NO.: E151XXXXXXX
SHEET NO.: 1 OF 4
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



E - Pakowanie bez workow
W - Pakowanie pojedynczo
Q - Szybkie pakowanie

ILOSC PRZEWODOW/NUMBER OF WIRES:
1=2 PRZEWODY,
2=2 PRZEWODY+UZIEMIENIE,
3=3 PRZEWODY+UZIEMIENIE.

TYP KABLA/CABLE TYPE
PATRZ TABELA 1/SEE TABLE 1

RODZAJ KABLA/CABLE CROSS SECTION AREA
PATRZ TABELA 2/SEE TABLE 2

KOLOR MOULDINGU/HEAD COLOUR:
G=SZARY/GREY,
N=CZARNY/BLACK,
T=PRZEZROCZYSTY/TRANSPARENT,
A=CZARNY/BLACK,
B=SZARY/GREY.

DLUGOSC KABLA W CM/CABLE LENGHT IN CM
NP:050=50 CM, 300=300 CM.

POLOZENIE PINU Z UZIEMIENIEM(PATRZ TABELE ORJENTACJA OBUDOWY)/EARTH PIN LOCATION(SEE INSERT ORIENTATION TABLE):
1=PODWOJNE UZIEMIENIE NA GODZINIE 6 ORAZ 12/DOUBLE EARTH ON 6H AND 12H,
2=UZIEMIENIE NA GODZINIE 12/1EARTH ON 12H,
6=UZIEMIENIE NA GODZINIE 6/EARTH ON 6H.
4=PODWOJNE UZIEMIENIE NA GODZINIE 3 ORAZ 9/DOUBLE EARTH ON 3H AND 9H,
3=UZIEMIENIE NA GODZINIE 3/1EARTH ON 3H,
9=UZIEMIENIE NA GODZINIE 9/EARTH ON 9H.

GASKET ORAZ SRUBY/GASKET SCREWS:
1=GASKET PROFILOWANY+SRUBA/NBR PROFILE GASKET+FIXING SCREWS,
2=NBR PLASKI GASKET+SRUBA/NBR FLAT GASKET+SCREW,
3=SILIKONOWY PROFILOWANY GASKET+SRUBA/SILICONE PROFILE GASKET+SCREW,
4=SILIKOWANY PLASKI GASKET+SRUBA/SILICON FLAT GASKET+SCREW,
P=ZINTEGROWANY GASKET+SRUBA/INTEGRATED GASKET+FIXING SCREW,
R=ZINTEGROWANY GASKET+SRUBA/INTAGRATED GASKET+SCREW,
T=PROFILOWANY GASKET+SRUBA, PROFILE GASKET+SCREW.

ORIGINAL RELEASE
EC NO: WEU2009-0394 2009/05/26
DRWN:MWOLSZCZAK 2009/05/29
CH'KD:MDABROWSKA 2009/06/08
APPR:GOGRODNIK
DESCRIPTION
A
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
FIRST ANGLE PROJECTION

DRAWN BY: MLEVYTSKYY DATE: 2009/01/21
CHECKED BY: MDABROWSKA DATE: 2009/01/21
APPROVED BY: MWOLSZCZAK DATE: 2009/01/21

TITLE: MPM E151XXXXXXXX

molex MOLEX INCORPORATED

MATERIAL NO.: SEE DRAWING
DOCUMENT NO.: E151XXXXXXXX
SHEET NO.: 2 OF 4
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TABELA 2 KABLE/TABLE 2 CABLES

MOLEX PN	mPm	Code	PRZEW.	PRZEKROJ	MATERIAL	KOLOR/COLOUR	SREDNICA Ø	DIN A-B	DIN C
1210180080	I	0	3	1 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	-	-	-
1210180467	A	2	2	20 AWG	PVC CSA/UL 2661	Czarny/Black	5,5+/-0,2 mm	OK.	OK.
-	A	2	3	20 AWG	PVC CSA/UL 2661	Czarny/Black	5,6+/-0,2 mm	OK.	OK.
1210180394	A	2	4	20 AWG	PVC CSA/UL 2661	Czarny/Black	6,2+/-0,2 mm	OK.	OK.
-	A	2	5	20 AWG	PVC CSA/UL 2661	Czarny/Black	7+/-0,2 mm	OK.	
1210180297	B	2	2	20 AWG	PUR CSA/UL 20668	Czarny/Black	5,5+/-0,2 mm	OK.	OK.
1210180126	B	2	3	20 AWG	PUR CSA/UL 20668	Czarny/Black	5,6+/-0,2 mm	OK.	OK.
1210180387	B	2	4	20 AWG	PUR CSA/UL 20668	Czarny/Black	6,2+/-0,2 mm	OK.	OK.
-	B	2	5	20 AWG	PUR CSA/UL 20668	Czarny/Black	7+/-0,2 mm	OK.	
1210180122	D	2	3	0,5 mm2	PVC TI2 CEI 20-20	Szary/Grey	-	-	-
-	F	2	3	0,5 mm2	CNOMO	Szary/Grey RAL7000	5,5+/-0,2 mm	OK.	OK.
1210180047	I	2	2	0,5 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	5,5+/-0,2 mm	OK.	OK.
-	I	2	3	0,5 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	5,5+/-0,2 mm	OK.	OK.
1210180146	I	2	4	0,5 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	6,5+/-0,2 mm	OK.	
1210180177	I	2	5	0,5 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	7+/-0,2 mm	OK.	
1210180022	N	2	2	0,5 mm2	PVCH03	Czarny/Black	5,1+ 0,2-0 mm	OK.	OK.
1210180064	N	2	3	0,5 mm2	PVCH03	Czarny/Black	5,4+ 0,2-0 mm	OK.	OK.
1210180153	N	2	4	0,5 mm2	PVCH03	Czarny/Black	5,75+0,2-0 mm	OK.	OK.
1210180046	P	2	2	0,5 mm2	PUR - BLEND	Czarny/Black	5,5+/-0,2 mm	OK.	OK.
-	P	2	3	0,5 mm2	PUR - BLEND	Czarny/Black	5,5+/-0,2 mm	OK.	OK.
1210180302	P	2	4	0,5 mm2	PUR - BLEND	Czarny/Black	-	-	-
-	P	2	5	0,5 mm2	PUR - BLEND	Czarny/Black	7+/-0,2 mm	OK.	OK.
1210180409	A	3	2	18 AWG	PVC CSA/UL 2661	Czarny/Black	6,5+/-0,2 mm	OK.	
1210180129	A	3	3	18 AWG	PVC CSA/UL 2661	Czarny/Black	6,5+/-0,2 mm	OK.	
1210180159	A	3	4	18 AWG	PVC CSA/UL 2661	Czarny/Black	7+/-0,2 mm	OK.	
-	A	3	5	18 AWG	PVC CSA/UL 2661	Czarny/Black	7,8+/-0,2 mm	OK.	
1210180351	B	3	2	18 AWG	PUR CSA/UL 20668	Czarny/Black	6,5+/-0,2 mm	OK.	
1210180127	B	3	3	18 AWG	PUR CSA/UL 20668	Czarny/Black	6,5+/-0,2 mm	OK.	
1210180127	B	3	4	18 AWG	PUR CSA/UL 20668	Czarny/Black	7+/-0,2 mm	OK.	
-	B	3	5	18 AWG	PUR CSA/UL 20668	Czarny/Black	7,8+/-0,2 mm	OK.	
1210180073	D	3	3	0,75 mm2	PVC TI2 CEI 20-20	Szary/Grey	-	-	-
1210180145	D	3	4	0,75 mm2	PVC TI2 CEI 20-20	Szary/Grey	-	-	-
1210180120	I	3	3	0,75 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	-	-	-
1210180143	I	3	4	0,75 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	-	-	-
1210180032	N	3	2	0,75 mm2	PVCH05	Czarny/Black	6,2+ 0,2-0 mm	OK.	
1210180069	N	3	3	0,75 mm2	PVCH05	Czarny/Black	6,6+0,2-0 mm	OK.	
-	N	3	4	0,75 mm2	PVCH05	Czarny/Black	7,15+0,2-0 mm	OK.	
1210180174	N	3	5	0,75 mm2	PVCH05	Czarny/Black	8,0+0,2-0 mm	OK.	
-	P	3	2	0,75 mm2	PUR - BLEND	Czarny/Black	6,5+/-0,2 mm	OK.	

TABELA 2 KABLE/TABLE 2 CABLES

MOLEX PN	mPm	Code	PRZEW.	PRZEKROJ	MATERIAL	KOLOR/COLOUR	SREDNICA Ø	DIN A-B	DIN C
1210180071	P	3	3	0,75 mm2	PUR - BLEND	Czarny/Black	6,5+/-0,2 mm	OK.	
1210180152	P	3	4	0,75 mm2	PUR - BLEND	Czarny/Black	7+/-0,2 mm	OK.	
1210180384	R	3	3	0,75 mm2	TPR HAL. FREE	Czarny/Black	6,5+/-0,2 mm	OK.	
1210180094	T	3	3	0,75 mm2	PUR CSA/UL	Żółty/Yellow	-	-	-
1210180309	Y	3	3	0,75 mm2	SIL/0300	Czerwony/Red	6,5+/-0,2 mm	-	-
1210180081	F	4	3	1 mm2	CNOMO	Szary/Grey RAL7000	-	-	-
-	F	4	4	1 mm2	CNOMO	Szary/Grey RAL7000	7,1+0,2-0 mm	OK.	
1210180042	I	4	2	1 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	7,1+0,2-0 mm	OK.	
1210180079	I	4	3	1 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	7,1+0,2-0 mm	OK.	
1210180036	N	4	2	1 mm2	PVCH05	Czarny/Black	6,5+0,2-0 mm	OK.	
1210180082	N	4	3	1 mm2	PVCH05	Czarny/Black	6,9+0,2-0 mm	OK.	
1210180117	R	4	3	1 mm2	TPR HAL. FREE	Czarny/Black	-	-	-
1210180085	N	5	3	1,5 mm2	PVCH05	Czarny/Black	8,3+0,2-0 mm	OK.	
1210180313	I	6	2	0,35 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	-	-	-
-	A	7	3	20 AWG	PVC CSA/UL 2661	Żółty/Yellow	5,6+/-0,2 mm	OK.	OK.
1210180149	I	9	4	0,75 mm2	PVC CEI 2022 II O.R.	Szary/Grey RAL7035	-	-	-

TABELA 1 TYPY KABLI/TABLE 1 CABLES TYPE

Znakowanie /Code	Rodzaje kabla /Cable types	Właściwości /Features	Przekroje /Stranding
N	PVC	Kabel z dobrą rezystancją w wodzie ale słabą w oleju./Application general purpose cable which has good resistance to water, but usually poor oil resistance.	0.5 mm2 = 15 x 0.20 0.75 mm2 = 21 x 0.20 1 mm2 = 28 x 0.20
I	PVC	Zatwierdzione przez IEC 332-2A, samogaszący./Approved to IEC 332-2A, flame retardant and self extinguishing. Limited resistant to mineral oils.	0.5 mm2 = 28 x 0.15 0.75 mm2 = 42 x 0.15 1 mm2 = 32 x 0.20
P	PVC	Dobra rezystancja w olejach i chemikaljach./Offer good resistance to oil and chemicals. Can swell when constantly immersed in water.	0.5 mm2 = 28 x 0.15 0.75 mm2 = 42 x 0.15 1 mm2 = 32 x 0.20
A	PVC	Zatwierdzony porzez CSA-UL 2661.Dobra rezystancja na wode słaba na olej./ Approved to CSA-UL 2661, application general purpose cable which has good resistance to water, but usually poor oil resistance.	20 AWG = 32 x 0.15 18 AWG = 52 x 0.15

ORIGINAL RELEASE
EC NO: WEU2009-0394 2009/05/26
DRWN:MWOLSZCZAK 2009/05/29
CH'KD:MDABROWSKA 2009/06/08
APPR:GGRODNIK
DESCRIPTION
A
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
FIRST ANGLE PROJECTION

DRAWN BY: MLEVYTSKYY DATE: 2009/01/21
CHECKED BY: MDABROWSKA DATE: 2009/01/21
APPROVED BY: MWOLSZCZAK DATE: 2009/01/21

TITLE: MPM E151XXXXXXXX

molex MOLEX INCORPORATED

MATERIAL NO.: SEE DRAWING
DOCUMENT NO.: E151XXXXXXXX
SHEET NO.: 3 OF 4
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TABELA 3/CHART 3

MOLEX P/N	WOODHEAD P/N
1210400938	E151A2A10011
1210400989	E151B2A11011
1210400987	E151B2A1201R
1210400988	E151B2A20011
1210401007	E151B2A3001R
1210400990	E151B2A50011
1210400983	E151I2N05011
1210400768	E151I2N15011
1210400884	E151I4N16011
1210400617	E151I6N50061
1210400984	E151N2N02411
1210400868	E151N2N10K11
1210400637	E151N3N08511
1210400031	E151N3N10011
1210400862	E151N3N1151R
1210400636	E151N3N12511
1210400032	E151N3N15011
1210400033	E151N3N15061
1210400034	E151N3N20011
1210400682	E151N3N20012
1210400712	E151N3N25K1P
1210400038	E151N3N35011
1210400041	E151P3N10011
1210400994	E151P3N1001P
1210400044	E151P3N20011
1210401131	E151I4N10061
1210401143	E151P3N03011
1210400972	W151N2N0551R
1210400975	W151N2N0601R
1210401130	W151N3N10011

MOLEX PN	WOODHEAD PN
1210400863	E151I4N30011
1210401139	E151N2N06512
1210400773	E151N2N30011
1210400959	E151N3N20021
1210401145	E151P3N30011

ORIGINAL RELEASE
EC NO: WEU2009-0394 2009/05/26
DRWN:MWOLSZCZAK 2009/05/29
CH'KD:MDABROWSKA 2009/06/08
APPR:GOGRODNIK
DESCRIPTION
A
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
FIRST ANGLE PROJECTION

DRAWN BY: MLEVYTSKYY DATE: 2009/01/21
CHECKED BY: MDABROWSKA DATE: 2009/01/21
APPROVED BY: MWOLSZCZAK DATE: 2009/01/21

TITLE: MPM E151XXXXXXXX

MOLEX INCORPORATED

MATERIAL NO.: SEE DRAWING
DOCUMENT NO.: E151XXXXXXXX
SHEET NO.: 4 OF 4
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION