
CC0402KPX5R6BB105

CC X5R, Ceramic, 1 uF, 10%, 10 VDC, X5R, "SMD, MLCC", 0402

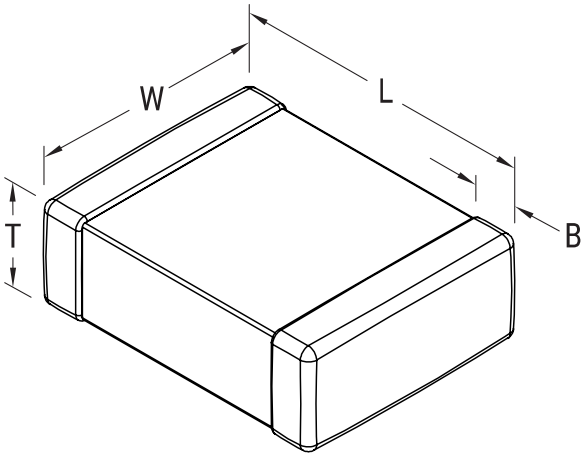

General Information	
Series	CC X5R
Style	SMD Chip
Description	"SMD, MLCC"
Features	Temperature Stable
RoHS	Yes
Termination	Tin
AEC-Q200	No
MSL	1

Dimensions	
Chip Size	0402
L	1mm +/-0.05mm
W	0.5mm +/-0.05mm
T	0.5mm +/-0.05mm
B	0.25mm +/-0.1mm

Specifications	
Capacitance	1 uF
Tolerance	10%
Voltage DC	10 VDC
Temperature Range	-55/+85°C
Temp. Coefficient	X5R
Insulation Resistance	1 MOhms

Packaging Specifications	
Packaging	T&R, 330mm, Paper Tape
Packaging Quantity	50000

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2025 YAGEO