THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -
© COPYRIGHT 1997 - ALL RIGHTS RESERVED.

LOC	DIST
A1	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G8	ECR-11-002636	05APR2011	SR	AR
	G9	ECR-11-016021	03AUG2011	GW	OH
	G10	ECR-15-001276	29JAN2015	GSK	MKO
	G11	ECR-16-016696	11SEP2017	GR	MKO

PART NO	A	B	NBR 2	FKM 3	EPDM COND 4	SERIES	NOTE	
	DIMENSIONS		MATERIAL					
9-9	28.0	2.5	X	-	-	EMV-K3/4	-	
9-4	3.5	1	X	-	-	AIR	-	
9-3	4.5	1.5	X	-	-	AIR	-	
9-2	47.7	3.5	X	-	-	AM-3P	-	
9-1	11.0	1.0	X	-	-	AM-1P	-	
8-2	54.0	3.0	X	-	-	AM-3P	-	
8-1	50.0	3.0	X	-	-	AS-1P	-	
~~7-6~~	~~168.0~~	~~3.0~~	~~X~~	~~-~~	~~-~~	~~AM-4P~~	~~-~~	OBSOLETE
7-2	50.0	2.0	-	X	-	Pg42	OBSOLETE	
7-1	50.0	2.0	X	-	-	Pg42	-	
~~6-6~~	~~135.0~~	~~3.0~~	~~X~~	~~-~~	~~-~~	~~AM-4P~~	~~-~~	OBSOLETE
6-2	44.0	2.0	-	X	-	Pg36	OBSOLETE	
~~6-1~~	~~44.0~~	~~2.0~~	~~X~~	~~-~~	~~-~~	~~Pg36~~	~~-~~	OBSOLETE
5-6	5.0	1.0	X	-	-	MDC	-	
5-3	7.0	3.0	X	-	-	AG-M6	-	
~~5-2~~	~~34.0~~	~~2.0~~	~~-~~	~~X~~	~~-~~	~~Pg29~~	~~COLOR GREY~~	OBSOLETE
5-1	34.0	2.0	X	-	-	Pg29	-	
4-6	12.5	2.5	X	-	-	MDC	-	
4-4	98.0	3.0	-	-	X	HP/EMV 24	OBSOLETE	
4-3	98.0	3.0	X	-	-	ABB-SO	-	
4-2	26.0	2.0	-	X	-	Pg21	-	
4-1	26.0	2.0	X	-	-	Pg21	-	
3-6	24.0	3.0	X	-	-	MDC	-	
3-5	64.0	3.0	X	-	-	AH-1P	-	
3-4	80.0	3.0	-	-	X	HP/EMV 16	OBSOLETE	
3-3	80.0	3.0	X	-	-	AK-1P	-	
3-2	20.0	1.5	-	X	-	Pg16	COLOR GREY	
3-1	20.0	1.5	X	-	-	Pg16	-	
2-6	250.0	3.0	X	-	-	MDC	-	
2-5	38.0	3.0	X	-	-	AH 1P	OBSOLETE	
2-4	67.0	2.8	-	-	X	HP/EMV10	-	
2-3	67.0	2.8	X	-	-	HP/EMV10	-	
2-2	18.0	1.5	-	X	-	Pg13.5	OBSOLETE	
~~2-1~~	~~18.0~~	~~1.5~~	~~X~~	~~-~~	~~-~~	~~Pg13.5~~	~~-~~	OBSOLETE
1-9	20.0	1.25	-	X	-	HC26	BLACK	G9
~~1-8~~	~~20.0~~	~~1.0~~	~~-~~	~~X~~	~~-~~	~~HC26~~	~~BLACK~~	OBSOLETE
~~1-7~~	~~4.0~~	~~1.0~~	~~-~~	~~X~~	~~-~~	~~ARR1~~	~~-~~	OBSOLETE
1-6	330	5.0	X	-	-	MDC	-	
1-5	19.0	1.8	X	-	-	Pg-Stv	OBSOLETE	
1-4	59.0	3.0	-	-	X	HP/EMV6	OBSOLETE	
1-3	59.0	3.0	X	-	-	HP/EMV6	-	
1-2	16.0	1.5	-	X	-	Pg11	OBSOLETE	
1-1	16.0	1.5	X	-	-	Pg11	-	
~~1-0~~	~~23.0~~	~~1.0~~	~~-~~	~~X~~	~~-~~	~~HC26~~	~~COLOR BLUE~~	OBSOLETE
0-9	23.52	1.78	-	X	-	HC25	-	
~~0-8~~	~~26~~	~~1.5~~	~~-~~	~~X~~	~~-~~	~~HC26~~	~~COLOR BLUE~~	OBSOLETE
~~0-7~~	~~40~~	~~2.5~~	~~X~~	~~-~~	~~-~~	~~HW G~~	~~-~~	OBSOLETE
0-6	25.0	1.5	X	-	-	ALM	COLOR BLACK	
0-5	17.5	1.5	-	X	-	HC20	COLOR BLUE	
0-4	17	1.0	-	X	-	HC20	COLOR BLUE	
0-3	21.2	2.65	-	X	-	HF-1-EMV-K	-	
0-2	3.0	1.0	X	-	-	HA-EMV-K	-	
0-1	13.0	1.5	X	-	-	Pg 09	-	

NOTES


1 PARTS SHALL BE FREE AND CLEAN OF SHARP EDGES AND ALL OTHER FOREIGN MATERIAL NO LOOSE BURRS PERMITTED.

2 NBR. 70°±5° SHORE A. BLACK. ACC .TO DIN 3770


3 FKM. 70°±5° SHORE A. TEMPERATURE RANGE -30°C / +200°C

4 EPDM. 65°±5°SHORE A. BLACK. ELECTRICAL CONDUCTIVE. RESISTIVITY: 8.05 x 10^3 OHMS PER CM

5 PACKAGING PN 0-1. 1000 PIECES MAX. IN A BOX

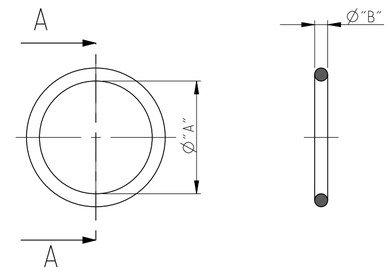

A-A



SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN Rösgen 26.05.1999	TE Connectivity	
DIMENSIONS: mm	CHK Schweiger 26.05.1999	NAME O-Ring - -	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	APVD -	SIZE A2	CAGE CODE 00779
	PRODUCT SPEC -	DRAWING NO C-1106053	RESTRICTED TO -
MATERIAL -	APPLICATION SPEC -	SCALE 1:1	SHEET 1 OF 1
FINISH -	WEIGHT -	CUSTOMER DRAWING	REV G11