
5535660 -2 Product Details

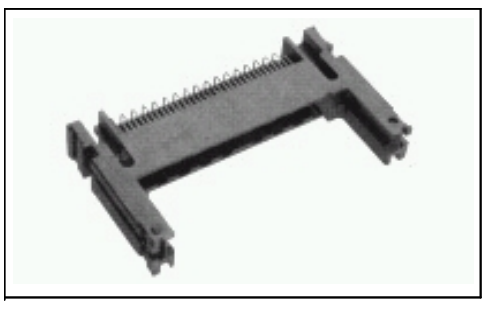

5535660 -2

Active

PC Card (PCMCIA) Connectors & Accessories

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Header
- Non-CardBus Application
- Header Type = Header Only
- Lead Type = Thru Hole
- Top Side Board Mount

View all Features | Find Similar Products

Live Product Chat US Only 8:30am - 5pm ET, Mon - Fri

Quick Links

Check Pricing & Availability
Search for Tooling
Product Feature Selector
Contact Us About This Product

Documentation & Additional Information

Product Drawings:

- PIN HEADER ASSY, 68 POSN, RAISED HT, TOP BD MTG, THR... (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version O)
- 3D Model (IGES, Version O)
- 3D Model (STEP, Version O)

List all Documents

Additional Information:

- Product Line Information

Related Products:

- Tooling

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Header
- Number of Positions = 68
- Mount Angle = Right Angle
- Shielded = No
- Mating Polarization = Without
- Holddowns = With
- Holddown Material = Phosphor Bronze
- Color = Black
- Comment = Two size M2 screws (customer supplied) are required for fastening the connector to the PC board.

Mechanical Attachment:

- Board Mount = Top Side
- Holddown Plating = Tin

Electrical Characteristics:

- Voltage (VAC) = 3.3

Termination Related Features:

- Solder Tail Contact Plating = Tin

Body Related Features:

- Header Type = Header Only
- Lead Type = Thru Hole
- Single/Double Slot = Single
- Centerline (mm [in]) = 1.27 [0.050]
- Number of Holddowns = 4

Contact Related Features:

- Contact Mating Area Plating = Gold (30)
- Region = Americas
- Contact Material = Brass
- Contact Underplating = Nickel (50)

Housing Related Features:

- Housing Material = Liquid Crystal Polymer (LCP)
- Housing Flammability Rating = UL 94V -0

Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- Height = Raised

Operation/Application:

- Application = Non -CardBus

Packaging Related Features:

- Packaging Method = Box

Other:

- Brand = AMP

© 2008 Tyco Electronics Corporation All Rights Reserved