
8-53426 -1 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

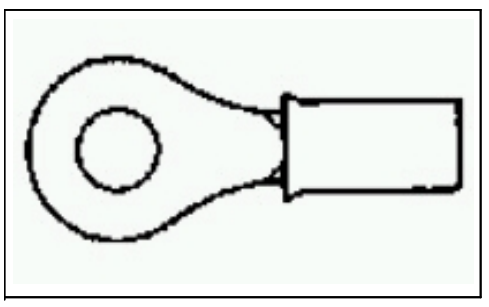

8-53426 -1

Active

Radiation Resistant/Pre -Insulated Terminals & Splices

Not EU RoHS or ELV Compliant (Find RoHS Compliant Alternates)

Product Highlights:

- Terminal
- Wire Range = 3.00 -6.00 ² [12-10] mm [AWG]
- Wire Range = 5180 - 13100 CMA
- Body Style = PIDG
- Wire Insulation Diameter = 5.84 mm

View all Features | Find Similar Products

Quick Links

Check Pricing & Availability
Search for Tooling
Product Feature Selector
Contact Us About This Product

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Additional Information:

- Product Line Information

Related Products:

- Tooling

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Terminal
- Body Style = PIDG
- Wire Insulation Diameter (mm [in]) = 5.84 [0.230]
- Stud Size = 1/4 [M6]
- Finish = Tin -Lead
- Tongue Material Thickness (mm [in]) = 1.04 [0.041]
- Color Code = Yellow
- Body Material = Copper
- Insulation = Yes
- Comment = Brazed Body

Body Related Features:

- Wire Range (mm [AWG]) = 3.00 -6.00 ² [12-10]
- Wire Range (CMA) = 5,180 – 13,100
- Insulation Sleeve Color = Natural
- Insulation Sleeve Material = PVF2
- Insulation Support Sleeve Material = Copper

Industry Standards:

- Government/Industry Qualification = No
- RoHS/ELV Compliance = Not ELV/RoHS compliant
- Lead Free Solder Processes = Not relevant for lead free process

Packaging Related Features:

- Packaging Method = Loose Piece
- Packaging Quantity = 100/Box

Other:

- Brand = AMP

© 2008 Tyco Electronics Corporation All Rights Reserved