

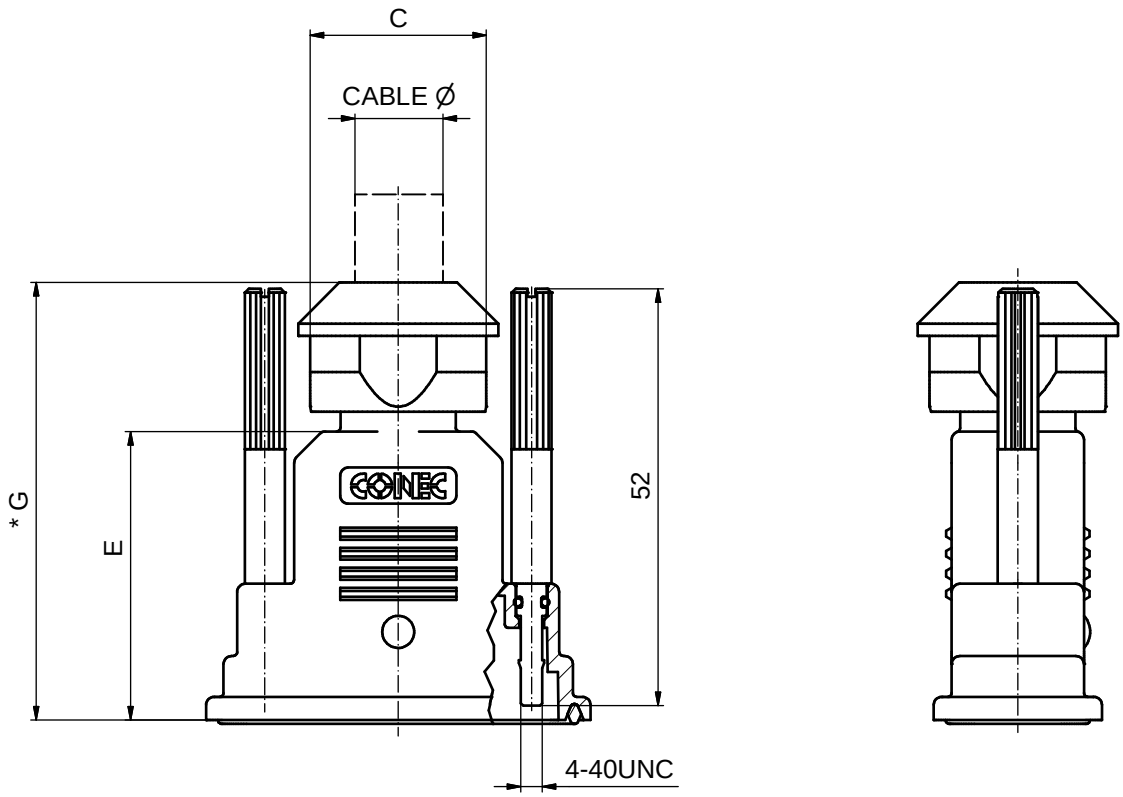


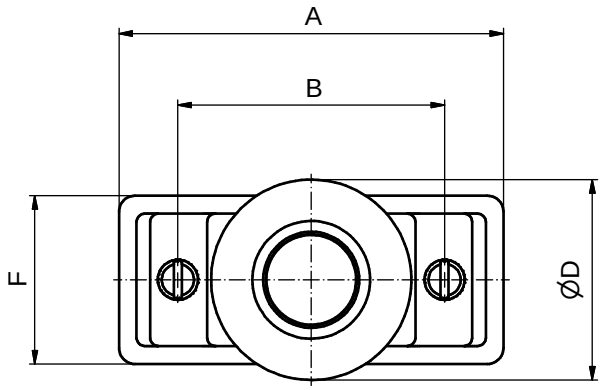

Shellsize	A	B	C	Ø D	E	F	* G ± 1	Cable Ø	Part-No.
2	48	33,3	22 A/F	25	36	21	54,6	9 - 11	15-004670
3	62	47,04	24 A/F	27	44	21	67,7	10 - 12	15-004680
4	78	63,5	28 A/F	31	53	25,2	77,2	14 - 16	15-004690
5	75,6	61,1	28 A/F	31	53	23,8	77,2	14 - 16	15-004700

(1 : 1)

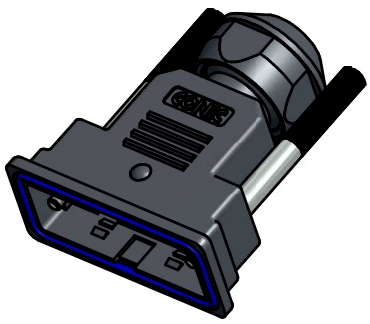

* COMPLETELY TIGHTENED

NOTES:

1. MATERIALS:
   HOOD: PBT GF UL94 V-0 BLACK
   FRONTSEALING: SILICONE VMQ BLUE
   SCREW: STAINLESS STEEL
   O-RING: NBR BLACK
2. TEMPERATURE RANGE: -30℃ TO +90℃
3. RECOMMENDED TORQUE FOR SCREW:
   35Ncm (3.1 in.LB)
   MAX. TORQUE: 68Ncm (6 in.LB)
4. SINGLE PACKED

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance ± 0,3 unless otherw. specified — dim. in mm

	date	name
drawn	19.09.12	Huether
appd.	11.10.12	Kuehle
norm		
d-old		

scale: 1,5:1 (1:1)
material: SEE NOTES

title:
WATER RESISTANT D-SUB HOOD
15-50 POS.
JACKSCREW 4-40UNC STAINLESS STEEL

dwg no: 15K1A1152 — DIN-A3 — sh: 1
part no: SEE TABLE