
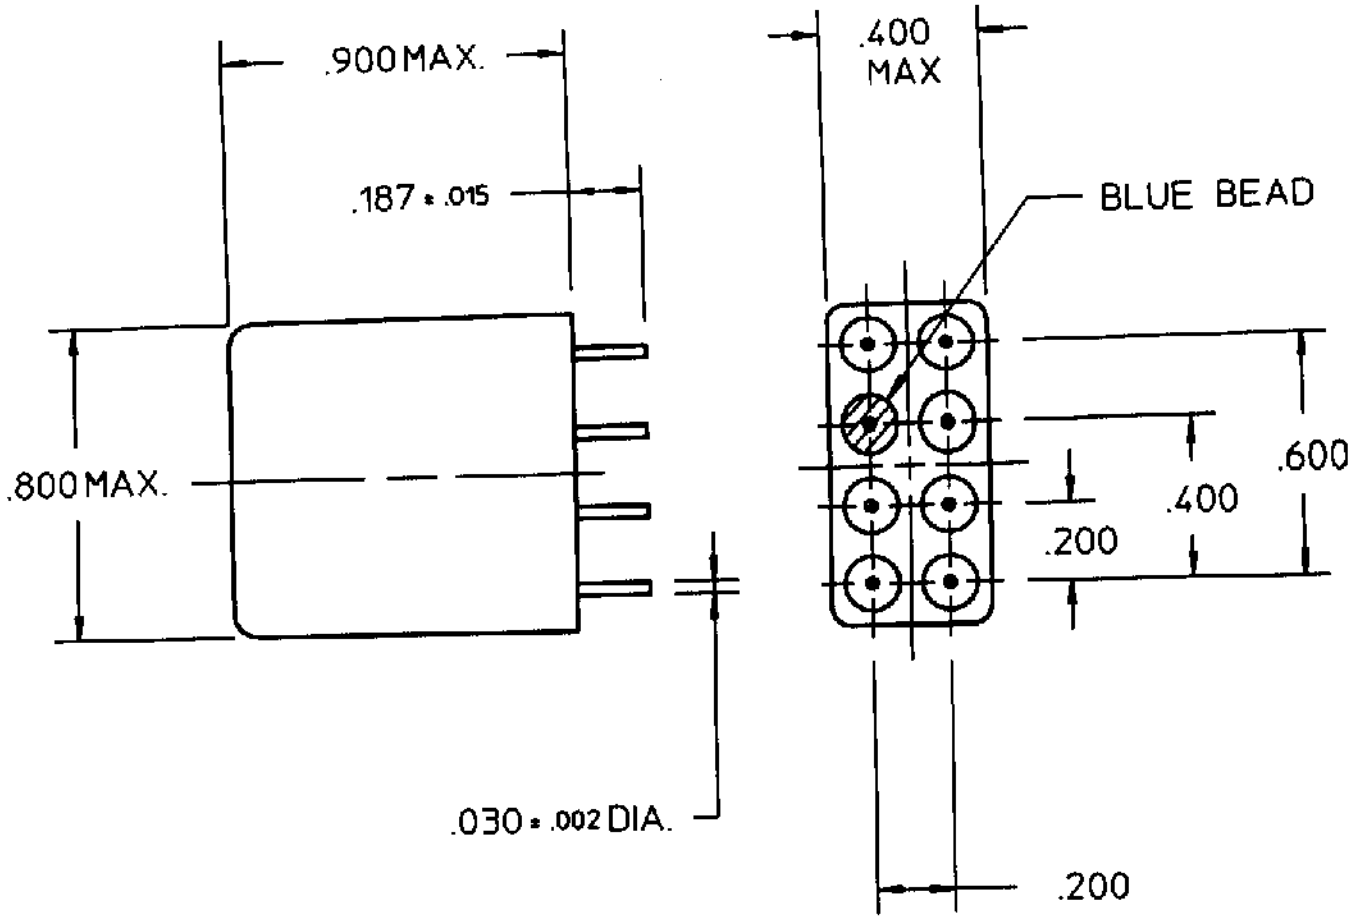


CUSTOMER DATA SHEET

COIL: @ 25°C

RESISTANCE	140 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.3 VDC
MUST RELEASE	.75 VDC

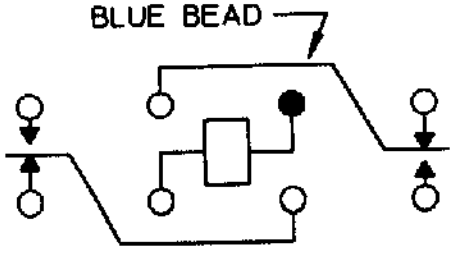

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 5 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

NOTES:

DR. R.B. 1/27/92 CK. 1/27/92 gnb

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2BN-2A-112

TYPE "FW" RELAY

FW5A1201S07

SUPERSEDED
NOT the LATEST REVISION