This document was generated on 02/21/2020


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 1731100079

Status: Active

Overview: FCT D-Sub Connectors

Description: FCT Standard-Density Waterproof D-Sub Connector, Female, Right-Angle, PCB Through Hole, Gold over Nickel Phosphorus Plating, Metal Watertight Frame, Snap-in Bolt, 25 Circuits

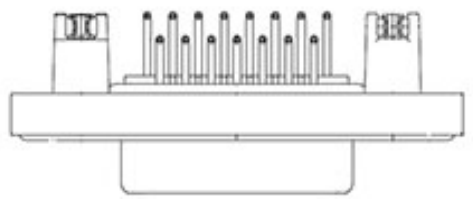

Series image - Reference only

Documents:

Datasheet (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family	D-Sub Products
Series	173110
IP Rating	IP67
Overview	FCT D-Sub Connectors
Product Category	D-Sub Connector
Product Name	FCT Products
Type	Standard Density
UPC	889056487481

Physical

Circuits (Loaded)	25
Circuits (maximum)	25
Color - Resin	Red
Durability (mating cycles max)	500
Gender	Female
Material - Contact	Copper Alloy
Material - Resin	PBT
Material - Shell	Brass
Net Weight	85.000/g
Number of Rows	2
Orientation	Right-Angle
PC Tail Length	10.50mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Carton
Panel Mount	Rear
Panel Mount Method	Thread-In
Pitch - Mating Interface	2.84mm
Pitch - Termination Interface	2.54mm
Plating - Contact	Gold over Nickel Phosphorus
Plating - Shell	Tin
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Shielded	Yes
Temperature Range - Operating	-25° to +70°C
Termination Style	Through Hole
Waterproof / Dustproof	Yes
Waterproof / Dustproof Type	IP67

Electrical

Current - Maximum per Contact	7.5A

Material Info

Engineering Number	FWDRM25S25A

EU ELV
Not Reviewed

EU RoHS
Not Reviewed

China RoHS

REACH SVHC
Not Reviewed

Halogen-Free Status
Not Reviewed

For more information, please visit Contact US

China ROHS	Not Reviewed
ELV	Not Reviewed
RoHS Phthalates	Not Reviewed

Search Parts in this Series
173110 Series

Mates With
FCT Standard Density D-Sub, Size 3, 25 Position, Plug

Use With
FCT D-Sub Dust Caps

This document was generated on 02/21/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION