


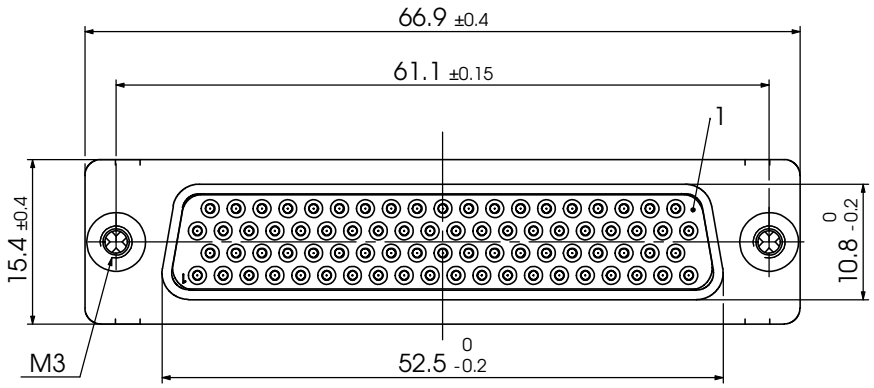




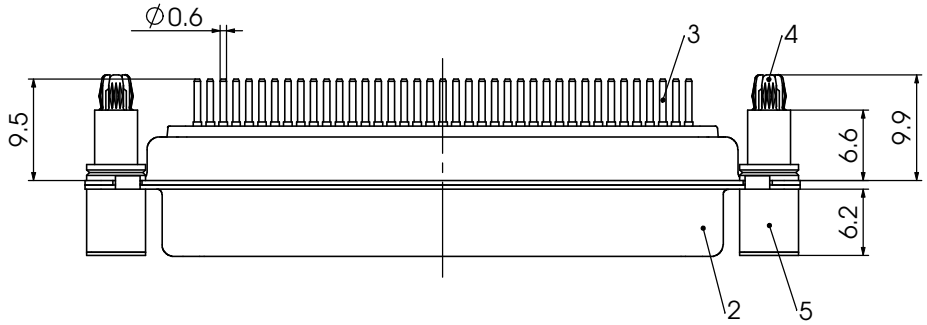

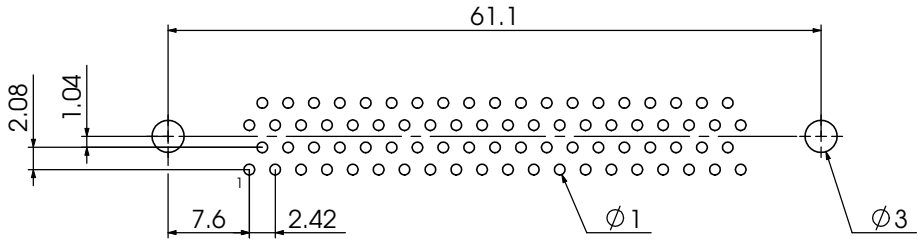

No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
5	2	Support sleeve	Brass	tin plated
4	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
3	78	Signal contact	S1 / Copper alloy	flash gold
2	1	Shell	Steel	tin plated
1	1	Insulator	Thermoplastic, GF UL 94V-0	

REV.	DATE	CH.-NO.
1		

Measurement without tolerance acc. to ISO 2768-m | SCALE 2:1

NAME / DATE

DRAWN birgit.rinder 24-11-2011

CHECKED Markus.Jobst 25-11-2011

FCT group fctgroup.com

ORIGINAL: DIN A3-DRAWING AS A FILE

TITLE: High Density D-Sub Connector

DWG.NO. CT50-78S1-1277

REV. 1

REPLACEMENT FOR:

PAGES 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.