VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com



Type I/II lightning arrestor for use downstream of the electrical meter

- Version suitable for use upstream of the electrical meter
- Suitable for protective zones III and IV (LPL III/IV)
- Can also be used as Type II surge protection
- Tested according to IEC 61643-11 for Type I and II surge protection
- Pluggable arrestor

General ordering data

Version	Surge voltage arrester, Low voltage, with remote contact, TN-C
Order No.	1352350000
Type	VPU I 3 R 400V/12,5KA
GTIN (EAN)	4050118157932
Qty.	1 pc(s).
Delivery status	This article will no longer be available in the future.
Available until	2022-05-19
Alternative product	2591540000
Replacement parts	1352280000 1402570000

Creation date December 4, 2023 1:48:45 PM CET

VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	69 mm	Depth (inches)	2.717 inch
Height	106 mm	Height (inches)	4.173 inch
Width	53.4 mm	Width (inches)	2.102 inch
Mounting dimension - height	75 mm	Net weight	600 g

Temperatures

Storage temperature	-40 °C...80 °C	Operating temperature	-40 °C...70 °C
Humidity	5 - 95% rel. humidity		

Connection data, remote alert

Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm²
Cross-section for connected wire, solid core, min.	0.14 mm²	Stripping length	8 mm

General data

Colour	black, orange	Design	Installation housing; 3TE, Insta IP 20
Optical function display	green = OK; red = arrester is defective - replace	Protection degree	IP20
Rail	TS 35	Segment	Power distribution
UL 94 flammability rating	V-0	Version	with remote contact

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	IV

Rated data IEC / EN

Discharge current I_{max} (8/20µs) wire-PE	50 kA	Discharge current I_n (8/20µs) wire-PE	20 kA
Energy coordination (≤10 m)	Type I, Type II, Type III	Follow-on current extinguishing capability I_{fi}	Not available due for technical reasons
Fuse	125 A gL > (if back up fuse > 125 A), No Fuse neccessary ≤125 A gG	Leakage current at U_n	100 µA
Lightning test current I_{imp} (10/350 µs) (L-PE)	12.5 kA	Low voltage network	TN-C
Mains voltage	230 V / 400 V, 400 V / 690 V	Max. continuous voltage, Uc (AC)	400 V
Number of poles	3	Protection level U_p at I_N (L/N-PE)	≤ 1.8 kV
Rated voltage (AC)	400 V	Requirements category acc. to IEC 61643-11	Type I, Type II
Requirements class, acc. to EN 61643-11	T1, T2	Response time	≤ 25 ns
Short-circuit current rating I_{SCCR}	25 kA	Signalling contact	250 V 1A 1CO
Standards	IEC61643-11, EN61643-11	Temporary surge voltage (over-voltage) - TOV	620 V
Voltage type	AC		

VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Connection data

Stripping length	15 mm	Type of connection	Screw connection
Stripping length, rated connection	15 mm	Tightening torque, min.	2 Nm
Tightening torque, max.	3 Nm	Clamping range, rated connection	16 mm²
Clamping range, min.	4 mm²	Clamping range, max.	35 mm²
Wire cross-section, solid, min.	2.5 mm²	Wire cross-section, solid, max.	16 mm²
Wire connection cross section, finely stranded, min.	2.5 mm²	Wire connection cross section, finely stranded, max.	25 mm²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	2.5 mm²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	50 mm²
Connection cross-section, stranded, min.	2.5 mm²	Connection cross-section, stranded, max.	50 mm²

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ETIM 9.0	EC000941
ECLASS 9.0	27-13-08-05	ECLASS 9.1	27-13-08-05
ECLASS 10.0	27-13-08-05	ECLASS 11.0	27-13-08-05
ECLASS 12.0	27-17-90-90	ECLASS 13.0	27179090

VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Tender specification sheets

Long specification	Multi-pin lightning arrestor according to the requirements of Class I in accordance with IEC 61643-11, EN61643-11:2013. On interface transition from 0 to 1 (in accordance with IEC 1312-1), the arrestor, made from V0 material, serves as lightning protection providing equipotential bonding and is used in applications in accordance with IEC 61643-12. The use of a high-performance varistor meets the inspection requirements for Class I surge protection systems according to the VDEW (Association of German Power Stations) directive. The arrestor is installed in the vicinity of the power supply for the equipment that needs protection, in a standard installation/ electrical distribution enclosure. The VPU I 3 R 400/690 V/12.5 kA is used in the single-phase TN-S mains network. With thermal separation device on the varistor. If protection is no longer available, the colour in the display window changes from green to red. The functional state is also displayed by a voltage-free signalling contact (changeover). Rated voltage: 230 VAC lightning test current (10/350 µs): 12.5 kA protection level with lightning test current < 1.8 kV 25 kA short-circuit withstand rating with max. back-up fuse of 250 A gl telecommunication output: contact: 250 V/0.5 A 48 VDC/0.1 A Type: Weidmüller VPU I 3 R 400 V/12.5 kA Order No. 1352350000 or equivalent	Short specification Class I arrester for LPL III/ IV with 12.5 kA suitable for 400/690 V TN-C mains systems. Protection level < 1.8 kV. With remote alert Type: Weidmüller VPU I 3 R 400 V/12.5 kA Order no. 1352350000 or equivalent

VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

Approvals	
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	EU_Konformitätserklärung / EU_Declaration_of_Conformity
Engineering Data	CAD data – STEP
User Documentation	Beipackzettel / Instruction sheet
Catalogues	Catalogues in PDF-format
Brochures	


VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

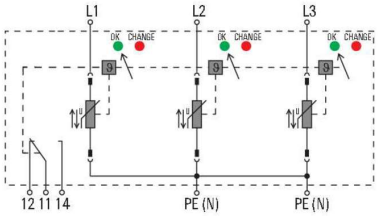

Schematic circuit diagram

VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Crosshead screwdriver Phillips



VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

General ordering data

Type	SDIK PH1 X 80	Version
Order No.	2749890000	Screwdriver, Blade width (B): 80 mm, Blade thickness (A):
GTIN (EAN)	4050118897098	
Qty.	1 pc(s).	

VPU I 3 R 400V/12,5KA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Replacement parts

L-PEN 400 V



Spare arrester Type I
Weidmüller VPU I surge protection products protect low-voltage consumer installations and electronic devices against overvoltages that can occur as a result of atmospheric discharges (thunderstorms) or switching operations (transients). The VPU I series meets the Type I and Type II requirements acc. to IEC 61643-11 and the Type 1 and Type 2 requirements acc. to EN 61643-11. The spare arresters are coded and can only be inserted into suitable bases.

General ordering data

Type	VPU I 0 400V/12,5KA	Version
Order No.	1352280000	Surge voltage arrester, Low voltage, Accessories, Spare arrester
GTIN (EAN)	4050118157994	
Qty.	1 pc(s).	

VPU Series



Versatile accessories round off the surge protection range. E.g. the all-purpose measuring device V-TEST, which is used to check the function of pluggable arresters such as VSPC.

General ordering data

Type	PLUG VPU	Version
Order No.	1402570000	VPU series, Accessories
GTIN (EAN)	4050118204360	
Qty.	10 pc(s).	