
HDC DSUB 25 TO UNC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

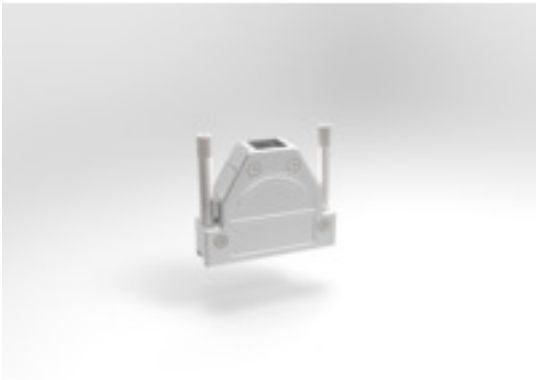

General ordering data

Order No.	2664700000
Type	HDC DSUB 25 TO UNC
GTIN (EAN)	4050118786668
Qty.	10 pc(s).

HDC DSUB 25 TO UNC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	63.5 g

Temperatures

Ambient temperature	-55° C ... 90° C (unter -40° C keine Schlagbelastung)

Design

Product family	RockStar® HDC SUBD			
Product type	Shell housing			
Number of cable entries	3			
Blade size, crosshead	PZ 1			
AF size	2.5 mm			
Tightening torque	Torque type	Cover screw		
	Usage information	Tightening torque	nominal	0.2 Nm
	Torque type	Locking screw		
	Usage information	Tightening torque	nominal	0.3 Nm
Earthing	Earth terminal			

General descriptions

Outgoing elbow	180°	Size of cable entries	max. Ø 14.0
Type of locking	Allen hex screw with spring washer, Thread 4-40 UNC	Size	SUBD 3
Protection degree	IP20		

Material

Material	Zinc

Classifications

ETIM 6.0	EC001132	ETIM 7.0	EC001132
ETIM 8.0	EC001132	ETIM 9.0	EC001132
ECLASS 9.0	27-44-03-02	ECLASS 9.1	27-44-03-90
ECLASS 10.0	27-44-03-02	ECLASS 11.0	27-44-03-02
ECLASS 12.0	27-44-03-02	ECLASS 13.0	27440302

Approvals

ROHS	Conform

Downloads

Engineering Data	CAD data – STEP
Catalogues	Catalogues in PDF-format