RED INDICATES ORIGINAL

DWG SIZE C

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS				12-02	SH 1
REV	ECO	DESCRIPTION	DWN	APPROVED	DATE
B	11670	-17, -19, -21, -23, CHANGED TO: -23, -25, -27 & -29; SEE ECO	DKC	Buy: FQ	6/25/96

P2 CONN TYPE	FIG NO	P1 CONN TYPE											
		PL20		UPL20		PL40		UPL40		PL123		UPL123	
		SCHEMATICS											
		K1	K2	K1	K2	K1	K2	K1	K2	K1	K2	K1	K2
		DASH NUMBERS											
PL20	1A	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12
UPL20	1A	-3	-4	-13	-14	-15	-16	-17	-18	-19	-20	-21	-22
PL40	1B	-5	-6	-15	-16	-23	-24	-25	-26	-27	-28	-29	-30
UPL40	1B	-7	-8	-17	-18	-25	-26	-31	-32	-33	-34	-35	-36
PL123	2A	-9	-10	-19	-20	-27	-28	-33	-34	-37	-38	-39	-40
UPL123	2B	-11	-12	-21	-22	-29	-30	-35	-36	-39	-40	-41	-42

INCH	MM
.005	0.13
.030	0.76
.500	12.7
.593	15.06
.650	16.51
2.070	52.58
2.123	53.92
2.124	53.95
2.178	55.32

FIG 1A (P1)

-1 SHOWN

-23 SHOWN

FIG 1B (P1)


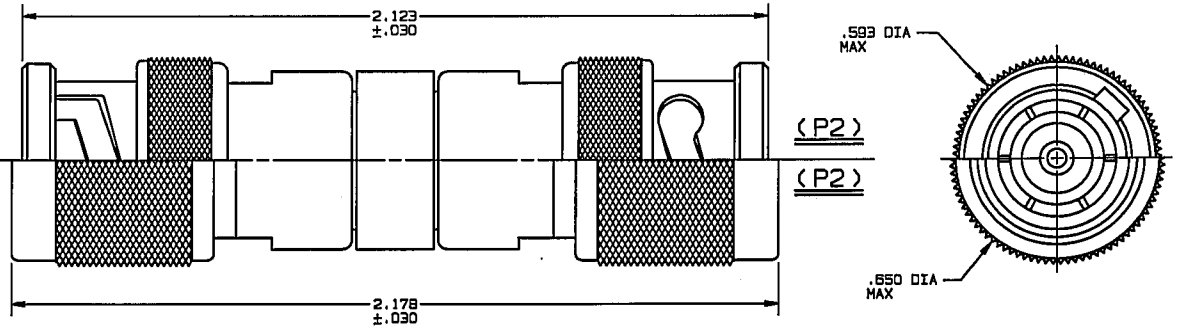


FIG 2A (P1)

-37 SHOWN


-27 SHOWN

FIG 2B (P1)

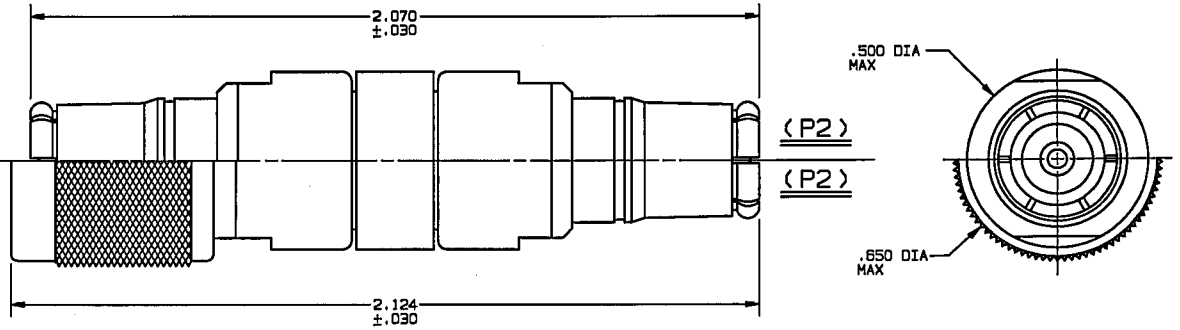

5. EXAMPLE OF COMPLETE MODEL NO:
   AD-PL20-K1-PL20
   ADAPTER — (P1) CONN TYPE; SCHEMATIC — (P2) CONN TYPE
4. EXAMPLE OF COMPLETE PART NO:
   BASIC PART NO 12-02-1 — DASH NO
3. BETWEEN / WITH SERIES ADAPTER, MALE 50 & 75 OHM BNC / TNC / PUSH-ON PLUG TO MALE 50 & 75 OHM BNC / TNC / PUSH-ON PLUG
2. FINISH: TFS-1A (NICKEL)
1. ALL DIM ARE IN INCHES

SCHEMATIC

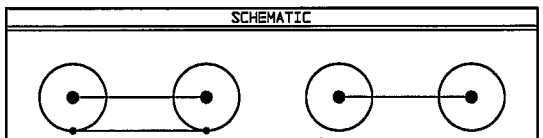

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ± .XXX ± .005 .XXXX± ANGLES±	TROMPETER ELECTRONICS, INC.	ADAPTERS: MALE BNC / TNC SERIES TO MALE BNC / TNC SERIES	

DWN	DKC	6-12-96	MATERIAL	CODE IDENT	DRAWING NO.	REV
CHK	BM	6-17-96	—	14949	12-02	B
ENGR	—					
APPR	FQ	6/24/96	SCALE 4/1	DATE 11-19-85	SHEET 1 OF 2	

NEXT ASSY