
ABB516B6WN

# Panel mounted inlet

# 2CMA105072R1000

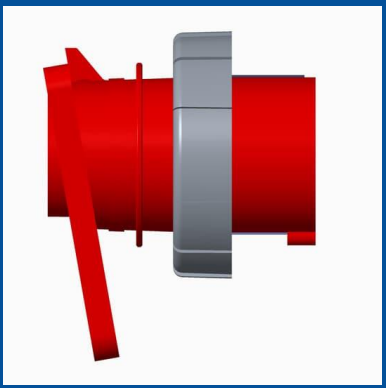

IEC Inlet for 16A and 200/346-240/415V AC 4P5W, UL/CSA/NSF approved and CE compliant

## GENERAL

| | |
|---|---|
| **Product Name** | Panel mounted inlet |
| **Product ID** | 2CMA105072R1000 |
| **Function** | Inlet |
| **EAN** | 739269722 |
| **Catalog Description** | Panel mounted inlets 16A-6h/200/346-240/415V~ |
| **Country of Origin** | Czech Republic (CZ) |
| **E-Number Finland** | |
| **E-Number Norway** | |
| **E-Number Sweden** | |
| **Standards** | UL 1682, 1686 / CSA C22.2 No. 182.1-13 |
| **RoHS Status** | Following EU Directive 2011/65/EU |

## TECHNICAL

| | |
|---|---|
| **Product Main Type** | TBAU |
| **Color** | Red |
| **Number of Poles** | 5 |
| **Clock Position** | 6Hour |
| **Rated Current** | 16 ampere |
| **Rated Voltage** | 200/346 ... 240/415 volt |
| **Frequency** | 50 hertz\|60 hertz |
| **Degree of Protection** | IP67 |
| **Cable Cross-Section** | 1.5...4 mm² |
| **Housing Material** | Thermoplastic (PBT) |
| **Plug Angle** | Straight |
| **Product Group** | Tough&Safe |

## DIMENSIONS

| | |
|---|---|
| **Product Net Width** | 87 millimetre |
| **Product Net Height** | 87 millimetre |
| **Product Net Length** | 91 millimetre |
| **Product Net Depth** | 91 millimetre |
| **Product Net Weight** | 0.210 kilogram |

## PACKAGING

| | |
|---|---|
| **Package Width** | 110 millimetre |
| **Package Height** | 110 millimetre |
| **Package Gross Weight** | 0.162 kilogram |
| **Package Length** | 110 millimetre |
| **Package Units** | box 1 piece |