
INDUSTRIAL@AMPHENOL TRUSTED GLOBALLY

432ERAU9W

Panel mounted socket

2CMA105966R1000

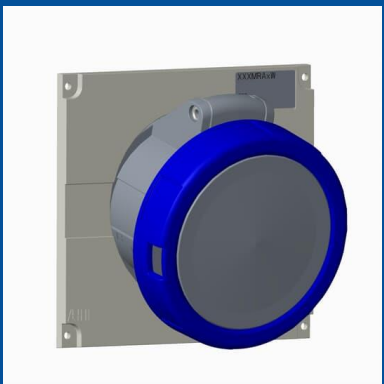

Socket-outlet, panel mounting, earthing sleeve position 9h, rated current 32A, IP67 watertight, unified flange, angled, 3-poles+neutral+earth, frequency 50-60 Hz, color code Blue

GENERAL

Product Name	Panel mounted socket
Product ID	2CMA105966R1000
Function	Outlet
EAN	73926959787
Catalog Description	Panel mounted sockets, 3P+N+E, 9 hour, Blue, IP67, 32A, 120/208 ... 144/250V
Country of Origin	Czech Republic (CZ)
E-Number Finland	
E-Number Norway	
E-Number Sweden	
Standards	IEC 60309-1, -2
RoHS Status	Following EU Directive 2011/65/EU

TECHNICAL

Product Main Type	ERAU
Color	Blue
Number of Poles	5
Clock Position	9Hour
Rated Current	32 ampere
Rated Voltage	120/208 ... 144/250 volt
Frequency	50 hertz|60 hertz
Degree of Protection	IP67
Cable Cross-Section	2.5...6 mm²
Housing Material	Plastic (PA)
Plug Angle	Angled
Product Group	Easy&Safe

DIMENSIONS

Product Net Width	113 millimetre
Product Net Height	119 millimetre
Product Net Length	114 millimetre
Product Net Depth	114 millimetre
Product Net Weight	0.313 kilogram

PACKAGING

Package Width	122 millimetre
Package Height	104 millimetre
Package Gross Weight	1.565 kilogram
Package Length	530 millimetre
Package Units	box 5 piece