
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F16	ADDED 8-0	07JUN2024	DP	HW
	F17	NOTE 2 DELETED	09OCT2024	VNB	RCG
	F18	REVISED AS PER ECR-25-240921	15APR2025	PK	VNB
	F19	REVISED AS PER ECR-25-255277	29AUG2025	PK	BM

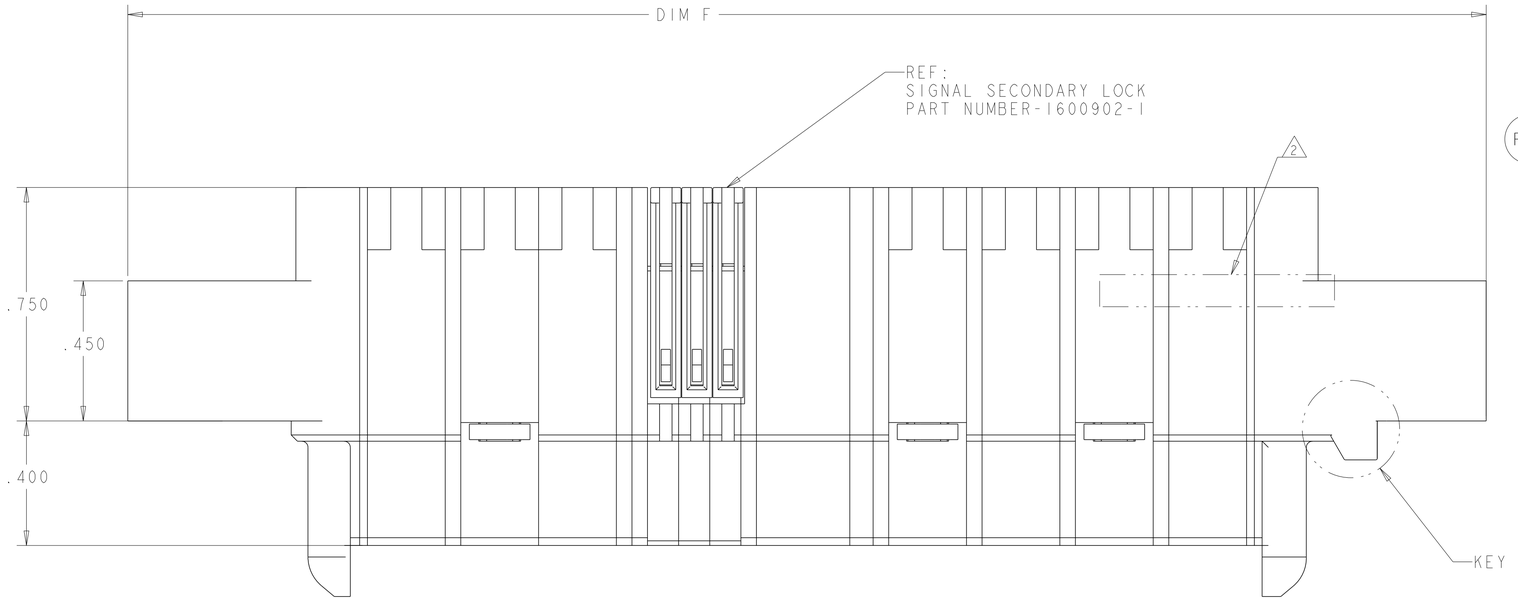

1 OPTIONAL CENTER MODULE.

F17 2 DELETED

3 MATERIAL: THERMO PLASTIC, UL94 V-0.

4 DATUM LOCATIONS AND BASIC DIMENSIONS TO BE ESTABLISHED BY THE CUSTOMER.

5 BULKHEAD THICKNESS RANGE: .031 - .100

7 CONNECTOR MATED TO PANEL FROM OPPOSITE SIDE.

8 NO BURRS ALLOWED ON OPPOSITE (MATING) SIDE.


9 CONNECTOR KEEP OUT ZONE.


10 MOUNT CONNECTOR WITH TYCO HARDWARE KIT (1600914-7 OR 1600000-3) FOR .050 [1.27mm] MIN RADIAL FLOAT.

11 VARIABLE DIM. PLEASE SEE TABLE OR DETAIL DIM PER PART NO.

12 FOR THE CONFIGURATION WITH VENT HOLES, PLEASE REFER TO THE SHEET 3.

13 FOR THE CONFIGURATION OF 3-1892903-2, PLEASE REFER TO THE SHEET 2.

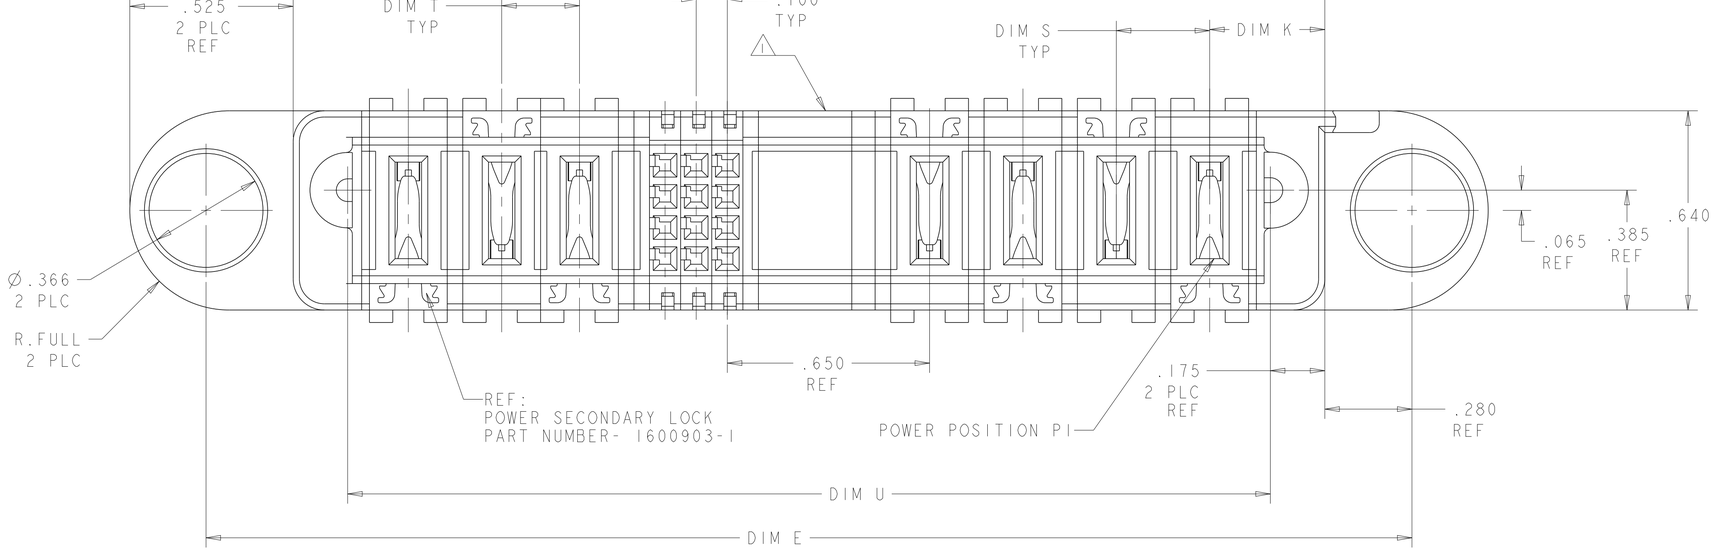

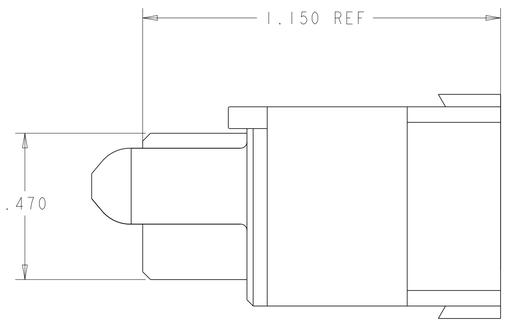

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°

MATERIAL - - 3

FINISH - -

DWN C ZHOU 09JUN2009
CHK S ZHAO 09JUN2009
APVD -
PRODUCT SPEC 108-2157
APPLICATION SPEC 114-13112
WEIGHT -

TE Connectivity

NAME
PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1892903	-


CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 10 | REV F19

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

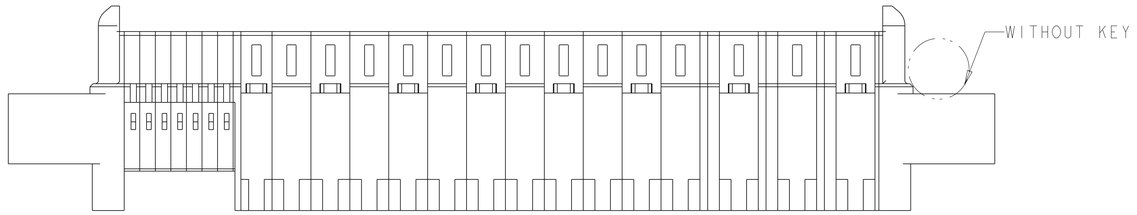

FOR THE CONFIGURATION WITHOUT KEY
PART NUMBER: 3-1892903-2

KIT P/N	△1	DIM T	DIM R	DIM W	DIM S	DIM U	DIM L	DIM K	DIM F	DIM E	DESCRIPTION	PART NUMBER
1600914-7	NO	-	-	.550	.115	1.970	2.320	.278	3.370	2.880	2LP + 64S	8-1892903-3
1600914-7	NO	.250	2.645	1.320	.250	3.390	3.740	.345	4.790	4.300	4P + 48S + 4P	8-1892903-2
1600914-7	NO	-	-	2.320	.425	2.690	3.040	.370	4.090	3.600	5ACP + 20S	8-1892903-1
1600914-7	NO	-	-	.820	.250	.990	1.340	.345	2.390	1.900	2P + 12S	8-1892903-0
1600914-7	NO	-	-	.920	.300	.890	1.240	.370	2.290	1.800	2ACP + 2S	7-1892903-8
1600914-7	NO	.300	2.370	1.220	.300	2.990	3.340	.370	4.540	3.900	3ACP + 40S + 3ACP	7-1892903-6
1600914-7	NO	-	1.495	.645	-	1.540	1.890	.395	2.940	2.450	1P + 28S + 1P	7-1892903-5
1600914-7	NO	.250	2.245	1.320	.250	2.990	3.340	.345	4.390	3.900	4P + 32S + 4P	7-1892903-4
1600914-7	NO	-	-	2.370	.250	5.040	5.390	.395	6.440	5.950	8P + 112S	7-1892903-3
1600914-7	NO	-	1.970	.620	-	1.990	2.340	.370	3.540	2.900	1ACP + 48S + 1ACP	7-1892903-2
KIT P/N	△1	DIM T	DIM R	DIM W	DIM S	DIM U	DIM L	DIM K	DIM F	DIM E	DESCRIPTION	PART NUMBER

KIT P/N	△1	DIM T	DIM R	DIM W	DIM S	DIM U	DIM L	DIM K	DIM F	DIM E	DESCRIPTION	PART NUMBER
1600914-7	NO	.250	2.150	.845	.250	2.840	3.190	.395	4.240	3.750	2P + 64S + 2P	7-1892903-1
1600914-7	NO	-	-	.345	-	.765	1.115	-	2.165	1.675	24S	7-1892903-0
1600914-7	NO	.300	1.970	1.520	.300	2.890	3.240	.370	4.290	3.800	4ACP + 12S + 4ACP	6-1892903-9
1600914-7	NO	.350	2.145	1.695	.350	3.240	3.590	.395	4.640	4.150	4ACP + 10S + 4ACP	6-1892903-7
1600914-7	NO	△1	△1	△1	△1	2.445	2.795	-	3.845	3.355	12S + 2LP + 5ACP	6-1892903-6
1600914-7	NO	.115	1.653	.295	-	2.155	2.505	-	3.555	3.065	52S + 6LP	6-1892903-5
1600914-7	NO	△1	△1	△1	△1	3.710	4.060	-	5.110	4.620	8S + 8LP + 8ACP	6-1892903-4
1600914-7	NO	-	1.970	1.220	.300	1.990	2.340	.370	3.390	2.900	3ACP + 24S + 1ACP	6-1892903-3
1600914-7	NO	.300	1.170	.920	.300	1.490	1.840	.370	2.890	2.400	2ACP + 4S + 2ACP	6-1892903-2
1600914-7	NO	-	.895	.645	-	.940	1.290	.395	2.340	1.850	1ACP + 4S + 1ACP	6-1892903-1
1600914-7	NO	.250	2.345	1.320	.250	3.090	3.440	.345	4.490	4.000	4P + 36S + 4P	6-1892903-0
1600914-7	NO	-	-	3.920	△1	4.640	4.990	.370	6.040	5.550	3ACP + 10P + 36S	5-1892903-7
1600914-7	NO	.115	2.3675	1.010	.115	2.640	2.990	.2775	4.040	3.550	6LP + 52S + 4LP	5-1892903-6
1600914-7	NO	.300	1.570	1.220	.300	2.190	2.540	.370	3.590	3.100	3ACP + 8S + 3ACP	5-1892903-4
1600914-7	NO	.300	1.570	1.220	.300	2.190	2.540	.370	3.590	3.100	3ACP + 8S + 3ACP	5-1892903-3
1600914-7	NO	.300	1.870	1.520	.300	2.790	3.140	.370	4.190	3.700	4ACP + 8S + 4ACP	5-1892903-2
1600914-7	NO	.300	1.270	.920	.300	1.590	1.940	.370	2.990	2.500	2ACP + 8S + 2ACP	5-1892903-1
1600914-7	NO	-	-	.295	-	1.140	1.490	-	2.540	2.050	40S	5-1892903-0
1600914-7	NO	.115	2.5675	1.010	.115	3.070	3.420	.2775	4.470	3.980	6LP + 60S + 6LP	4-1892903-8
1600914-7	NO	.115	.7825	.550	.115	.825	1.175	.2775	2.225	1.735	2LP + 8S + 2LP	4-1892903-7
1600914-7	NO	-	-	2.195	△1	2.615	2.965	.370	4.015	3.525	3ACP + 4P + 24S	4-1892903-6
1600000-3	NO	.300	1.670	.920	.300	1.990	2.340	.370	3.390	2.900	2ACP + 24S + 2ACP	4-1892903-5
1600914-7	NO	△1	.820	.295	-	3.440	3.790	-	4.840	4.350	16S + 1IP	4-1892903-4
1600914-7	NO	-	-	4.420	△1	4.940	5.290	.370	6.340	5.850	15P + 28S	4-1892903-3
1600914-7	NO	.200	1.295	.720	.200	1.490	1.840	.345	2.890	2.400	2HDP+ 20S + 2HDP	4-1892903-2
1600914-7	NO	.300	-	5.050	.300	5.170	5.520	.370	6.570	6.080	15ACP + 2LP + 12S	4-1892903-0
1600914-7	NO	.300	1.370	.920	.300	1.690	2.040	.370	3.090	2.600	2ACP + 12S + 2ACP	3-1892903-9
1600914-7	NO	.300	1.970	.920	.300	2.290	2.640	.370	3.690	3.200	2ACP + 36S + 2ACP	3-1892903-8
1600914-7	NO	.300	1.970	.920	.300	2.290	2.640	.370	3.690	3.200	2ACP + 36S + 2ACP	3-1892903-7
1600914-7	NO	.300	1.970	1.220	.300	2.590	2.940	0.370	3.990	3.500	3ACP + 20S + 3ACP	3-1892903-6
1600914-7	NO	-	-	1.520	.300	2.140	2.490	.370	3.540	3.050	4ACP + 32S	3-1892903-5
1600914-7	NO	-	.845	.545	-	.840	1.190	.345	2.240	1.750	1P + 8S + 1P	3-1892903-4
1600914-7	NO	-	.970	.620	-	.990	1.340	.370	2.390	1.900	1ACP + 8S + 1ACP	3-1892903-3
1600914-7	NO	-	-	4.420	△1	4.940	5.290	.370	6.340	5.850	15P + 28S	3-1892903-2
1600914-7	NO	-	-	4.420	△1	4.940	5.290	.370	6.340	5.850	15P + 28S	3-1892903-1
1600000-3	NO	.300	1.470	.920	.300	1.790	2.140	.370	3.190	2.700	2ACP + 16S + 2ACP	3-1892903-0
1600914-7	NO	.250	.620	.295	-	.865	1.215	-	2.265	1.775	8S + 2P	2-1892903-9
1600914-7	NO	.250	.620	.295	-	1.365	1.715	-	2.765	2.275	8S + 4P	2-1892903-8
1600914-7	NO	.250	2.345	1.820	.250	3.090	3.440	.345	4.490	4.000	6P + 16S + 4P	2-1892903-7
1600914-7	NO	-	-	.295	-	.640	.990	-	2.040	1.550	20S	2-1892903-6
1600914-7	NO	-	-	1.320	.200	1.640	1.990	.345	3.040	2.550	5HDP + 20S	2-1892903-5
1600914-7	NO	.250	1.495	1.020	.250	1.990	2.340	.345	3.390	2.900	3P + 16S + 3P	2-1892903-4
1600914-7	NO	.300	.970	.620	-	1.290	1.640	.370	2.690	2.200	1ACP + 8S + 2ACP	2-1892903-2
1600914-7	NO	.300	1.870	1.220	.300	2.490	2.840	.370	3.890	3.400	3ACP + 20S + 3ACP	2-1892903-1
1600914-7	NO	.200	1.020	.720	.200	1.390	1.740	.320	2.790	2.300	2HDP + 8S + 3HDP	2-1892903-0
1600914-7	NO	-	-	4.420	△1	4.940	5.290	.370	6.340	5.850	15P + 28S	1-1892903-9
1600914-7	NO	.300	1.070	.320	-	3.490	3.840	-	4.890	4.400	24S + 9P	1-1892903-7
1600914-7	NO	△1	2.170	.795	△1	4.390	4.740	.345	5.790	5.300	2P + 48S + 10P	1-1892903-6
1600000-3	NO	.300	1.770	1.220	.300	2.390	2.740	.370	3.790	3.300	3ACP + 16S + 3ACP	1-1892903-5
1600000-3	NO	-	-	1.270	.300	1.590	1.940	.395	2.990	2.500	3ACP + 16S	1-1892903-4
1600000-3	NO	-	-	1.520	.200	1.790	2.140	.320	3.190	2.700	6P + 16S	1-1892903-3
1600914-7	NO	-	-	1.845	.375	1.890	2.240	.345	3.290	2.800	4ACP + 8S	1-1892903-1
1600914-7	NO	.250	1.345	.845	.250	1.640	1.990	.395	3.040	2.550	2HDP + 16S + 2HDP	1-1892903-0
1600914-7	NO	.250	2.770	1.845	.250	3.540	3.890	.370	4.940	4.300	6P + 32S + 4P	1892903-8
1600914-7	NO	.300	1.920	1.170	.300	2.490	2.840	.320	3.890	3.400	3ACP + 24S + 3ACP	1892903-7
1600914-7	NO	.115	1.853	1.220	.300	2.125	2.475	.370	3.525	3.035	3ACP + 24S + 4LP	1892903-4
1600914-7	NO	△1	△1	△1	△1	5.040	5.390	.345	6.440	5.950	2P+16S+1P+2ACP+5P+ 2ACP+1P+16S+1P+8S	1892903-3
1600914-7	YES	△1 △2	2.395	1.920	.300	2.965	3.315	.370	4.365	3.875	4ACP + 12S + 3P	1892903-1
KIT P/N	△1	DIM T	DIM R	DIM W	DIM S	DIM U	DIM L	DIM K	DIM F	DIM E	DESCRIPTION	PART NUMBER

F19
F18

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°

MATERIAL - -
FINISH - -

DWN C ZHOU 09JUN2009
CHK S ZHAO 09JUN2009
APVD -
PRODUCT SPEC 108-2157
APPLICATION SPEC 114-13112
WEIGHT -

TE Connectivity

NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1892903	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 2 OF 10 | REV F19

4805 (3/11)

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER P7	POWER P6	POWER P5	SIGNAL 3	SIGNAL 2	SIGNAL 1	BLANK	POWER P4	POWER P3	POWER P2	POWER P1
1892903-1	D	RA	RM	RM	E	E	E	BLANK	RM	RM	RM	RM
	C				E	E	E					
	B				E	E	E					
	A				E	E	E					
4ACP + 12S + 3P												

.300 .250

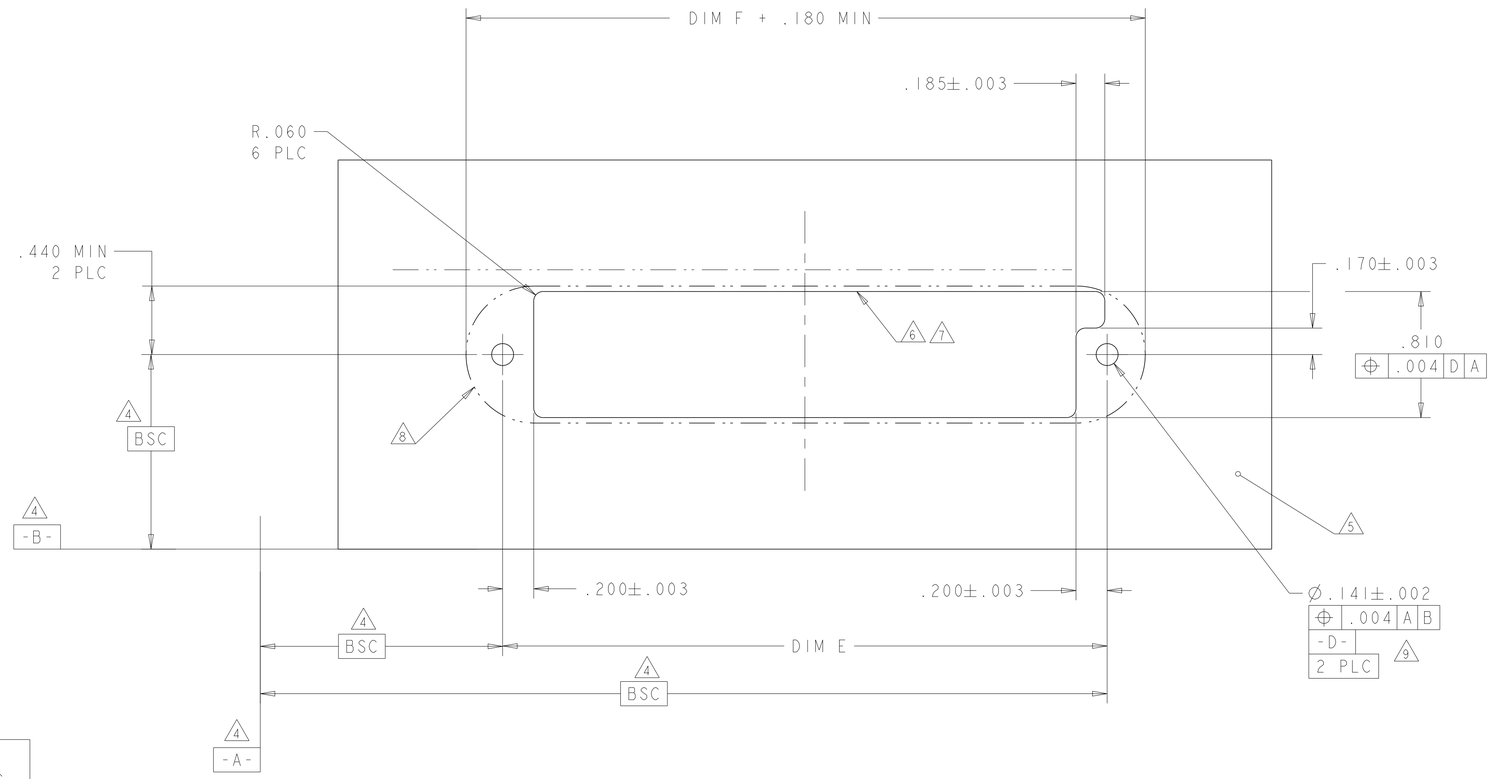

BULKHEAD LAYOUT

REFERENCE POWER WIRE CHART - RM & RA CONTACTS		
HOUSING MODULE	CONTACT	INSULATION DIAMETER RANGE
.300	8-10 1600960 REF	[.176-.272]
.250	8-10 1600960 REF	[.176-.203]
	12-14 1600961 REF	[.156-.176]
.200	12-14 1600961 REF	[.120-.156]
.100	22-26 5531216-5 REF	[.036-.069]

-	NO CONTACTS LOADED
LP	LOW POWER CONTACT
RA	MFBL POWER CONTACT
RM	STANDARD POWER CONTACT
E	SIGNAL CONTACT
CODE	DESCRIPTION

CONTACT TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°

MATERIAL -
FINISH -

DWN C.ZHOU 09JUN2009
CHK S.ZHAO 09JUN2009
APVD -
PRODUCT SPEC 108-2157
APPLICATION SPEC 114-13112
WEIGHT -

TE Connectivity

NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1892903	-

CUSTOMER DRAWING SCALE 4:1 SHEET 3 OF 10 REV F19

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		SIGNAL		POWER	SIGNAL									POWER		SIGNAL				POWER	
			10	9	P14	8	7	6	5	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	4	3	2	1	P2	P1
1892903-3	D C B A		E E E E	E E E E	RM	E E E E E E E E E E E E E E E E				RM	RM	RM	RM	RM	RM	RM					E E E E E E E E E E E E E E E E				RM	RA
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																										

NO CONTACTS LOADED

PART NUMBER	ROWS		POWER		SIGNAL				POWER	
			P4	P3	4	3	2	1	P2	P1
1-1892903-0	D C B A		RM	RM	E E E E E E E E E E E E E E E E				RM	RM
2HDP + 16S + 2HDP										

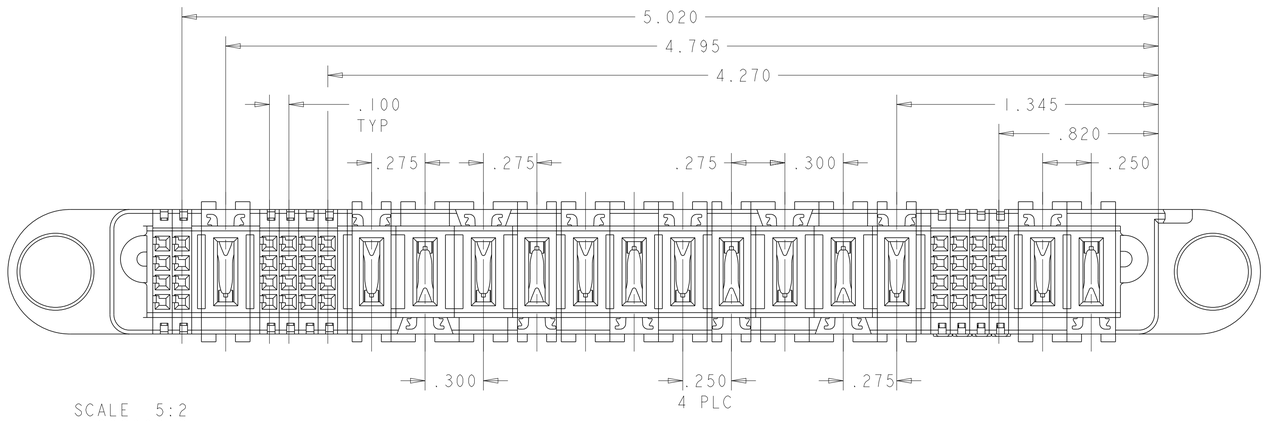

SCALE 5:2
1892903-3

PART NUMBER	ROWS		SIGNAL		POWER			
			2	1	P4	P3	P2	P1
1-1892903-1	D C B A		E E E E E E E E		RA	RM	RM	RM
4ACP + 8S								

FOR THE CONFIGURATION WITH VENT HOLES
PART NUMBER: 1-1892903-1

PART NUMBER	ROWS		POWER			SIGNAL						POWER		
			P7	P6	P5	P4	6	5	4	3	2	1	P3	P2	P1
1892903-4	D C B A		LP	LP	LP	LP	E E E E E E E E E E E E E E E E						RA	RM	RA
3ACP + 24S + 4LP															

PART NUMBER	ROWS		POWER			SIGNAL						POWER		
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1
1892903-7	D C B A		RM	RM	RM	E E E E E E E E E E E E E E E E						RM	RM	RM
3ACP + 24S + 3ACP														

PART NUMBER	ROWS		POWER				SIGNAL								POWER					
			P10	P9	P8	P7	8	7	6	5	4	3	2	1	P6	P5	P4	P3	P2	P1
1892903-8	D C B A		RM	RM	RM	RM	E E E E E E E E E E E E E E E E								RM	RM	RM	RM	RM	RM
6P + 32S + 4P																				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C ZHOU 09JUN2009	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2°	CHK S ZHAO 09JUN2009	NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE
		APVD -	
		PRODUCT SPEC 108-2157	
		APPLICATION SPEC 114-13112	SIZE A1 / CAGE CODE 00779 / DRAWING NO C-1892903 / RESTRICTED TO -
MATERIAL - -	FINISH - -	WEIGHT -	
		CUSTOMER DRAWING	SCALE 4:1 / SHEET 4 OF 10 / REV F19

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS
1-1892903-3	D C B A

6P + 16S

SIGNAL				POWER					
4	3	2	1	P6	P5	P4	P3	P2	P1
E	E	E	E						
E	E	E	E						
E	E	E	E						
E	E	E	E						
				RM			RM		RM

NO CONTACTS LOADED

PART NUMBER	ROWS
1-1892903-5	D C B A

3ACP + 16S + 3ACP

POWER			SIGNAL				POWER		
P6	P5	P4	4	3	2	1	P3	P2	P1
			E	E	E	E			
			E	E	E	E			
			E	E	E	E			
			E	E	E	E			
RM	RM	RM					RM	RM	RM

PART NUMBER	ROWS
1-1892903-4	D C B A

3ACP + 16S

SIGNAL				POWER		
4	3	2	1	P3	P2	P1
E	E	E	E			
E	E	E	E			
E	E	E	E			
E	E	E	E			
				RM	RM	RM

PART NUMBER	ROWS
1-1892903-7	D C B A

24S + 9P

POWER									SIGNAL					
P9	P8	P7	P6	P5	P4	P3	P2	P1	6	5	4	3	2	1
									E	E	E	E	E	E
									E	E	E	E	E	E
									E	E	E	E	E	E
									E	E	E	E	E	E
RM	RM	RM	RM		RM	RM	RM	RM						

NO CONTACT LOADED

PART NUMBER	ROWS
1-1892903-6	D C B A


2P + 48S + 10P

POWER										SIGNAL												POWER	
P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	12	11	10	9	8	7	6	5	4	3	2	1	P2	P1
										E	E	E	E	E	E	E	E	E	E	E	E		
										E	E	E	E	E	E	E	E	E	E	E	E		
										E	E	E	E	E	E	E	E	E	E	E	E		
										E	E	E	E	E	E	E	E	E	E	E	E		
RM		RM		RM				RM															RM

NO CONTACTS LOADED

NO CONTACTS LOADED

NO CONTACT LOADED

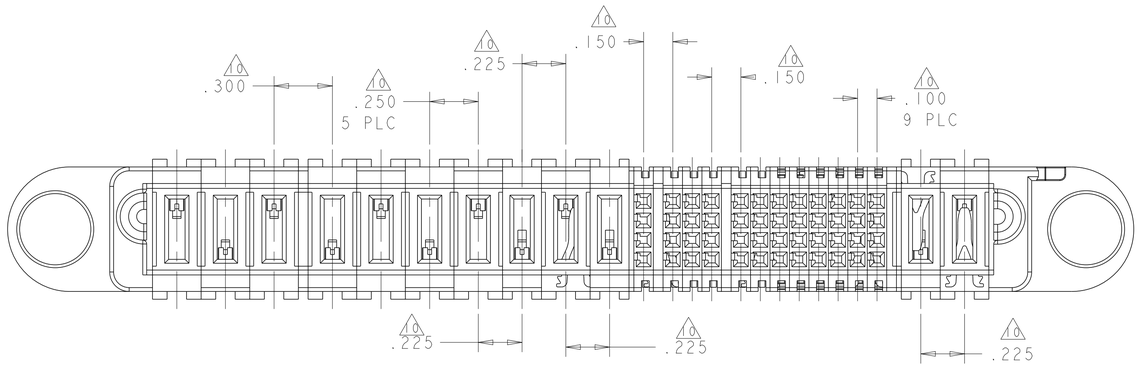

PART 1-1892903-6

PART NUMBER	ROWS
1-1892903-9	D C B A

15P + 28S

SIGNAL							POWER																	
7	6	5	4	3	2	1	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1
E	E	E				E															
E	E	E				E															
E	E	E				E															
E	E	E				E															
							RM	RM			RM	RM			RM			RA	RM	RM	RM

NO CONTACTS LOADED

1 .250 11 PLC

1 .375 3 PLC

NO CONTACTS LOADED

PART NUMBER	ROWS
2-1892903-0	D C B A

2HDP + 8S + 3HDP

POWER			SIGNAL		POWER	
P5	P4	P3	2	1	P2	P1
			E	E		
			E	E		
			E	E		
			E	E		
RM	RM	RM			RM	RM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°

MATERIAL - -
FINISH - -

DWN C.ZHOU 09JUN2009
CHK S.ZHAO 09JUN2009
APVD -
PRODUCT SPEC 108-2157
APPLICATION SPEC 114-13112
WEIGHT -

TE Connectivity

NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1892903	-

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	5 OF 10	F19

4805 (3/11)

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER P6	POWER P5	POWER P4	SIGNAL 5	SIGNAL 4	SIGNAL 3	SIGNAL 2	SIGNAL 1	POWER P3	POWER P2	POWER P1
2-1892903-1	D	RM	RM	RM	E	E	E	E	E	RM	RM	RM
	C				E	E	E	E	E			
	B				E	E	E	E	E			
	A				E	E	E	E	E			

3ACP + 20S + 3ACP

PART NUMBER	ROWS	POWER P4	POWER P3	POWER P2	POWER P1	SIGNAL 2	SIGNAL 1
2-1892903-8	D	RM	RA	RM	RA	E	E
	C					E	E
	B					E	E
	A					E	E

8S + 4P

PART NUMBER	ROWS	POWER P3	POWER P2	SIGNAL 2	SIGNAL 1	POWER P1
2-1892903-2	D	RA	RM	E	E	RM
	C			E	E	
	B			E	E	
	A			E	E	

1ACP + 8S + 2ACP

PART NUMBER	ROWS	POWER P2	POWER P1	SIGNAL 2	SIGNAL 1
2-1892903-9	D	RM	RA	E	E
	C			E	E
	B			E	E
	A			E	E

8S + 2P

PART NUMBER	ROWS	POWER P4	POWER P3	SIGNAL 4	SIGNAL 3	SIGNAL 2	SIGNAL 1	POWER P2	POWER P1
3-1892903-0	D	RM	RM	E	E	E	E	RM	RM
	C			E	E	E	E		
	B			E	E	E	E		
	A			E	E	E	E		

2ACP + 16S + 2ACP

PART NUMBER	ROWS	POWER P6	POWER P5	POWER P4	SIGNAL 4	SIGNAL 3	SIGNAL 2	SIGNAL 1	POWER P3	POWER P2	POWER P1
2-1892903-4	D	RM	RM	RM	E	E	E	E	RM	RM	RM
	C				E	E	E	E			
	B				E	E	E	E			
	A				E	E	E	E			

3P + 16S + 3P

PART NUMBER	ROWS	SIGNAL 5	SIGNAL 4	SIGNAL 3	SIGNAL 2	SIGNAL 1	POWER P5	POWER P4	POWER P3	POWER P2	POWER P1
2-1892903-5	D	E	E	E	E	E	RM	-	RM		RM
	C	E	E	E	E	E					
	B	E	E	E	E	E					
	A	E	E	E	E	E					

5HDP + 20S

NO CONTACTS LOADED

PART NUMBER	ROWS	SIGNAL 7	SIGNAL 6	SIGNAL 5	SIGNAL 4	SIGNAL 3	SIGNAL 2	SIGNAL 1	POWER P15	POWER P14	POWER P13	POWER P12	POWER P11	POWER P10	POWER P9	POWER P8	POWER P7	POWER P6	POWER P5	POWER P4	POWER P3	POWER P2	POWER P1
3-1892903-1	D								RM	RM	RM					RM	RM	RM	RM	RA	RM	RM	RM
	C																						
	B																						
	A																						

15P + 28S

NO CONTACTS LOADED NO CONTACTS LOADED

PART NUMBER	ROWS	SIGNAL 5	SIGNAL 4	SIGNAL 3	SIGNAL 2	SIGNAL 1
2-1892903-6	D	E	E	E	E	E
	C	E	E	E	E	E
	B	E	E	E	E	E
	A	E	E	E	E	E

20S

PART NUMBER	ROWS	POWER P2	SIGNAL 2	SIGNAL 1	POWER P1
3-1892903-3	D	RM	E	E	RA
	C		E	E	
	B		E	E	
	A		E	E	

1P + 8S + 1P

PART NUMBER	ROWS	POWER P10	POWER P9	POWER P8	POWER P7	SIGNAL 4	SIGNAL 3	SIGNAL 2	SIGNAL 1	POWER P6	POWER P5	POWER P4	POWER P3	POWER P2	POWER P1
2-1892903-7	D	RM	RA	RM	RA	E	E	E	E	RA	RM	RA	RM	RA	RM
	C					E	E	E	E						
	B					E	E	E	E						
	A					E	E	E	E						

6P + 16S + 4P

PART NUMBER	ROWS	POWER P2	SIGNAL 2	SIGNAL 1	POWER P1
3-1892903-4	D	RM	E	E	RM
	C		E	E	
	B		E	E	
	A		E	E	

1P + 8S + 1P

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°

MATERIAL - -
FINISH - -

DWN C.ZHOU 09JUN2009
CHK S.ZHAO 09JUN2009
APVD -
PRODUCT SPEC 108-2157
APPLICATION SPEC 114-13112
WEIGHT -

TE Connectivity

NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1892903 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 4:1 | SHEET 6 OF 10 | REV F19

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS	SIGNAL 7	6	5	4	3	2	1	POWER P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1
3-1892903-2	D	E	E	E			E				RM	RM			RM	RM			RA	RM	RM	RM	
	C	E	E	E			E																
	B	E	E	E			E																
	A	E	E	E			E																
15P + 28S																							

NO CONTACTS LOADED

NO CONTACTS LOADED

1 .250 1 IPLC

1 .375 3 PLC

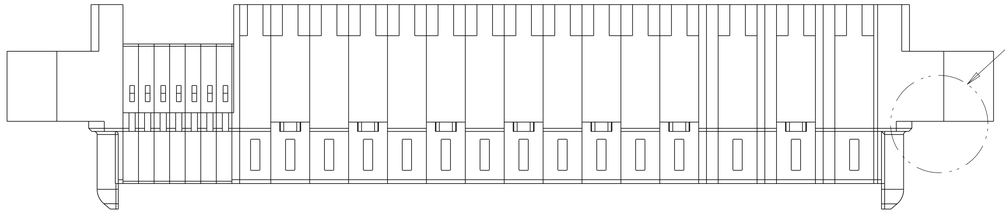

3-1892903-2

PART NUMBER	ROWS	POWER P4	P3	SIGNAL 9	8	7	6	5	4	3	2	1	POWER P2	P1
3-1892903-7	D	RM	RM	E	E	E	E	E	E	E	E	E	RM	RM
	C			E	E	E	E	E	E	E	E	E		
	B			E	E	E	E	E	E	E	E	E		
	A			E	E	E	E	E	E	E	E	E		
2ACP + 36S + 2ACP														

PART NUMBER	ROWS	POWER P4	P3	SIGNAL 9	8	7	6	5	4	3	2	1	POWER P2	P1
3-1892903-8	D	RM	RM	-	-	-	-	-	-	-	-	-	RM	RM
	C			-	-	-	-	-	-	-	-	-		
	B			-	-	-	-	-	-	-	-	-		
	A			-	-	-	-	-	-	-	-	-		
2ACP + 36S + 2ACP														

PART NUMBER	ROWS	POWER P4	P3	SIGNAL 3	2	1	POWER P2	P1
3-1892903-9	D	RM	RM	E	E	E	RM	RM
	C			E	E	E		
	B			E	E	E		
	A			E	E	E		
2ACP + 12S + 2ACP								

PART NUMBER	ROWS	SIGNAL 3	2	1	LOW POWER LP2	LP1	HIGH POWER P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1
4-1892903-0	D	E	E	E	LP	LP	-	-	RM	-	-	RM	RM	-	-	-	RM	RM	-	-	RM
	C	E	E	E																	
	B	E	E	E																	
	A	E	E	E																	
15ACP + 2LP + 12S																					

NO CONTACTS LOADED

PART NUMBER	ROWS	SIGNAL 8	7	6	5	4	3	2	1	POWER P5	P4	P3	P2	P1
3-1892903-5	D	E	E	E	E	E	E	E	-	RM	RM	RM	RM	RA
	C	E	E	E	E	E	E	E	-					
	B	E	E	E	E	E	E	E	-					
	A	E	E	E	E	E	E	E	-					
5ACP + 32S														

NO CONTACTS LOADED

PART NUMBER	ROWS	POWER P4	P3	SIGNAL 5	4	3	2	1	POWER P2	P1
4-1892903-2	D	RM	RM	E	E	E	E	E	RM	RM
	C			E	E	E	E	E		
	B			E	E	E	E	E		
	A			E	E	E	E	E		
2HDP + 20S + 2HDP										

PART NUMBER	ROWS	POWER P6	P5	P4	SIGNAL 6	5	4	3	2	1	POWER P3	P2	P1
3-1892903-6	D	RM	RM	RM	E	E	E	E	E	E	RM	RM	RM
	C				E	E	E	E	E	E			
	B				E	E	E	E	E	E			
	A				E	E	E	E	E	E			
3ACP + 24S + 3ACP													

PART NUMBER	ROWS	SIGNAL 7	6	5	4	3	2	1	POWER P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1
4-1892903-3	D	E	E	E	E	E	E		RM	RM	RM	RM		RM	RM	RM	RM		RA	RM	RM	RM	
	C	E	E	E	E	E	E																
	B	E	E	E	E	E	E																
	A	E	E	E	E	E	E																
15P + 28S																							

NO CONTACTS LOADED

NO CONTACTS LOADED

1 .375 3 PLC

1 .250 11 PLC

PART NUMBER	ROWS	POWER P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	SIGNAL 4	3	2	1
4-1892903-4	D	RM	RM	RM	RM	RM	RM	RA	RA	RA	RA	RA			E	E
	C														E	E
	B														E	E
	A														E	E
16S + 11P																

1 .375

1 .250 9 PLC

NO CONTACTS LOADED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.ZHOU 09JUN2009	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2°	CHK S.ZHAO 09JUN2009	NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE
		APVD -	
		PRODUCT SPEC 108-2157	
		APPLICATION SPEC 114-13112	SIZE A1 CAGE CODE 00779 DRAWING NO C-1892903 RESTRICTED TO -
MATERIAL - -	FINISH - -	WEIGHT -	
CUSTOMER DRAWING		SCALE 4:1	SHEET 7 OF 10 REV F19

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER		SIGNAL						POWER	
		P4	P3	6	5	4	3	2	1	P2	P1
4-1892903-5	D	RM	RM	E	E	E	E	E	E	RM	RM
	C			E	E	E	E	E	E		
	B			E	E	E	E	E	E		
	A			-	-	-	-	-	-		

2ACP + 24S + 2ACP

NO CONTACTS LOADED

PART NUMBER	ROWS	POWER								SIGNAL		POWER			
		P8	P7	P6	P5	2	1	P4	P3	P2	P1				
5-1892903-2	D	RM	RM	RM	RM	E	E	RA	RA	RA	RA				
	C					E	E								
	B					E	E								
	A					E	E								

4ACP + 8S + 4ACP

PART NUMBER	ROWS	SIGNAL						POWER						
		6	5	4	3	2	1	P7	P6	P5	P4	P3	P2	P1
4-1892903-6	D	E	E	E	E	E	E	RM	RM	RM	RA	RM	RM	RM
	C	E	E	E	E	E	E							
	B	E	E	E	E	E	E							
	A	-	-	-	-	-	-							

3ACP + 4P + 24S

⚠1 .250 3 PLC

.300 3 PLC ⚠1

PART NUMBER	ROWS	POWER				SIGNAL		POWER						
		P6	P5	P4		2	1	P3	P2	P1				
5-1892903-3	D	RM	RM	RM		E	E	RM	RM	RA				
	C					E	E							
	B					E	E							
	A					E	E							

3ACP + 8S + 3ACP

PART NUMBER	ROWS	POWER			SIGNAL		POWER						
		P6	P5	P4	2	1	P3	P2	P1				
5-1892903-4	D	RM	RM	RM	E	E	RM	RM	RM				
	C				E	E							
	B				E	E							
	A				E	E							

3ACP + 8S + 3ACP

PART NUMBER	ROWS	POWER				SIGNAL		POWER		
		LP4	LP3			2	1	LP2	LP1	
4-1892903-7	D	LP	LP			E	E	LP	LP	
	C					E	E			
	B					E	E			
	A					E	E			

2LP + 8S + 2LP

PART NUMBER	ROWS	LOW POWER				SIGNAL										LOW POWER					
		LP10	LP9	LP8	LP7	13	12	11	10	9	8	7	6	5	4	3	2	1	LP6	LP5	LP4	LP3	LP2	LP1
5-1892903-6	D	LP	LP	LP	LP	E	E	E	E	E	E	E	E	E	E	E	E	E	LP	LP	LP	LP	LP	LP
	C					E	E	E	E	E	E	E	E	E	E	E	E	E						
	B					E	E	E	E	E	E	E	E	E	E	E	E	E						
	A					E	E	E	E	E	E	E	E	E	E	E	E	E						

6LP + 52S + 4LP

PART NUMBER	ROWS	LOW POWER						SIGNAL														LOW POWER					
		LP12	LP11	LP10	LP9	LP8	LP7	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	LP6	LP5	LP4	LP3	LP2	LP1
4-1892903-8	D	LP	LP	LP	LP	LP	LP	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	LP	LP	LP	LP	LP	LP
	C							E	E	E	E	E	E	E	E	E	E	E	E	E	E	E						
	B							E	E	E	E	E	E	E	E	E	E	E	E	E	E	E						
	A							E	E	E	E	E	E	E	E	E	E	E	E	E	E	E						

6LP + 60S + 6LP

PART NUMBER	ROWS	SIGNAL									
		10	9	8	7	6	5	4	3	2	1
5-1892903-0	D	E	E	E	E	E	E	E	E	E	E
	C	E	E	E	E	E	E	E	E	E	E
	B	E	E	E	E	E	E	E	E	E	E
	A	E	E	E	E	E	E	E	E	E	E

40S

PART NUMBER	ROWS	SIGNAL										POWER														
		9	8	7	6	5	4	3	2	1		P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1		
5-1892903-7	D	E	E	E	E					E			RM	RM			RM	RM		RA	RM	RM	RM			
	C	E	E	E	E					E																
	B	E	E	E	E					E																
	A	E	E	E	E					E																

3ACP + 10P + 36S

NO CONTACTS LOADED

.375 3 PLC

.250 9 PLC

NO CONTACTS LOADED

PART NUMBER	ROWS	POWER		SIGNAL		POWER		
		P4	P3	2	1	P2	P1	
5-1892903-1	D	RM	RM	E	E	RA	RA	
	C			E	E			
	B			E	E			
	A			E	E			

2ACP + 8S + 2ACP

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN C.ZHOU 09JUN2009	TE Connectivity	
DIMENSIONS: INCHES	CHK S.ZHAO 09JUN2009	NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2°	APVD -		
	PRODUCT SPEC 108-2157		
	APPLICATION SPEC 114-13112	SIZE A1 / CAGE CODE 00779 / DRAWING NO C-1892903	RESTRICTED TO -
MATERIAL - -	WEIGHT -		
FINISH - -	CUSTOMER DRAWING	SCALE 4:1 / SHEET 8 OF 10	REV F19

4805 (3/11)

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL									POWER				
			P8	P7	P6	P5	9	8	7	6	5	4	3	2	1	P4	P3	P2	P1	
6-1892903-0	D		RM	RM	RM	RM	E	E	E	E	E	E	E	E	E	RA	RA	RA	RA	
	C						E	E	E	E	E	E	E	E	E					
	B						E	E	E	E	E	E	E	E	E					
	A						E	E	E	E	E	E	E	E	E					
4P + 36S + 4P																				

PART NUMBER	ROWS		POWER	SIG	POWER	
			P2	1	P1	
6-1892903-1	D		RM	E	RA	
	C			E		
	B			-		
	A			-		
1ACP + 4S + 1ACP						

PART NUMBER	ROWS		POWER		SIG	POWER		
			P4	P3	1	P2	P1	
6-1892903-2	D		RM	RM	E	RM	RM	
	C				E			
	B				E			
	A				E			
2ACP + 4S + 2ACP								

PART NUMBER	ROWS		POWER	SIGNAL						POWER			
			P4	6	5	4	3	2	1	P3	P2	P1	
6-1892903-3	D		RM	E	E	E	E	E	E	RM	RM	RM	
	C			E	E	E	E	E	E				
	B			E	E	E	E	E	E				
	A			E	E	E	E	E	E				
3ACP + 24S + 1ACP													

PART NUMBER	ROWS		POWER														SIG	
			P8	P7	P6	P5	P4	P3	P2	P1	LP8	LP7	LP6	LP5	LP4	LP3	LP2	LP1	2	1
6-1892903-4	D		RM	RM	RM	RM	RM	RM	RM	RM	LP	LP	LP	LP	LP	LP	LP	LP	E	E
	C																		E	E
	B																		E	E
	A																		E	E
8S + 8LP + 8ACP																				

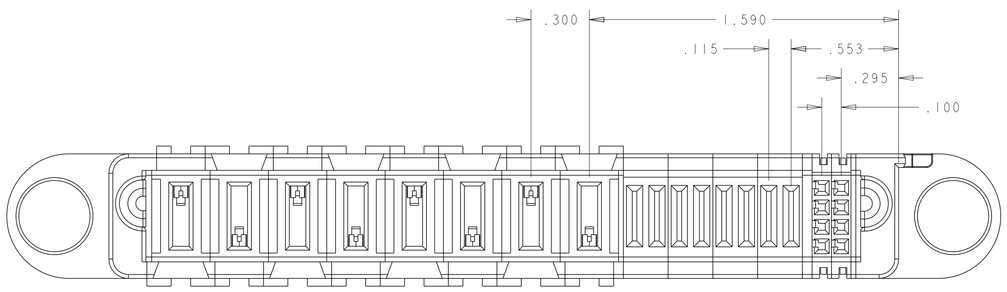


PART NUMBER 6-1892903-4

PART NUMBER	ROWS		POWER				SIGNAL			POWER			
			P8	P7	P6	P5	3	2	1	P4	P3	P2	P1
6-1892903-7	D		RM	RM	RM	RM	E	-	-	RM	RM	RM	RM
	C						E	E	E				
	B						E	E	E				
	A						E	E	E				
4ACP + 10S + 4ACP													

PART NUMBER	ROWS		LOW POWER						SIGNAL											
			LP6	LP5	LP4	LP3	LP2	LP1	13	12	11	10	9	8	7	6	5	4	3	2	1
6-1892903-5	D		LP	LP	LP	LP	LP	LP	E	E	E	E	E	E	E	E	E	E	E	E	E
	C								E	E	E	E	E	E	E	E	E	E	E	E	E
	B								E	E	E	E	E	E	E	E	E	E	E	E	E
	A								E	E	E	E	E	E	E	E	E	E	E	E	E
52S + 6LP																					

PART NUMBER	ROWS		POWER					LOW POWER		SIGNAL		
			P5	P4	P3	P2	P1	LP2	LP1	3	2	1
6-1892903-6	D		RM	RM	RM	RM	RM	LP	LP	E	E	E
	C									E	E	E
	B									E	E	E
	A									E	E	E
12S + 2LP + 5ACP												

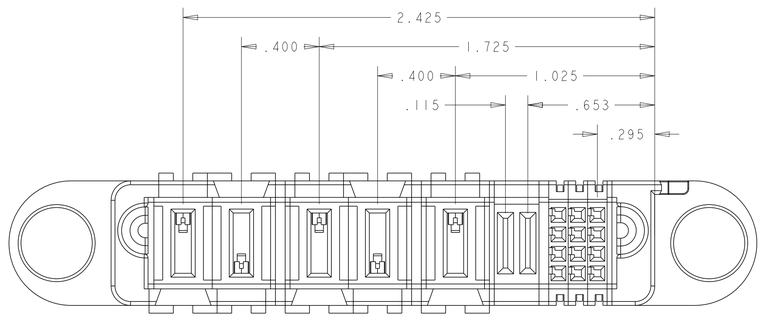

PART NUMBER 6-1892903-6

PART NUMBER	ROWS		POWER				SIGNAL			POWER			
			P8	P7	P6	P5	3	2	1	P4	P3	P2	P1
6-1892903-9	D		RM	RM	RM	RM	E	E	E	RM	RM	RM	RM
	C						E	E	E				
	B						E	E	E				
	A						E	E	E				
4ACP + 12S + 4ACP													

PART NUMBER	ROWS		SIGNAL					
			6	5	4	3	2	1
7-1892903-0	D		E	E	E	E	E	E
	C		E	E	E	E	E	E
	B		E	E	E	E	E	E
	A		E	E	E	E	E	E
24S								

PART NUMBER	ROWS		POWER	SIGNAL											POWER	
			P2	12	11	10	9	8	7	6	5	4	3	2	1	P1	
7-1892903-2	D		RM	E	E	E	E	E	E	E	E	E	E	E	E	RM	
	C			E	E	E	E	E	E	E	E	E	E	E	E		
	B			E	E	E	E	E	E	E	E	E	E	E	E		
	A			E	E	E	E	E	E	E	E	E	E	E	E		
1ACP + 48S + 1ACP																	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°

MATERIAL -
FINISH -

DWN C.ZHOU 09JUN2009
CHK S.ZHAO 09JUN2009
APVD -
PRODUCT SPEC 108-2157
APPLICATION SPEC 114-13112
WEIGHT -

TE Connectivity

NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1892903 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 4:1 | SHEET 9 OF 10 | REV F19

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	SIGNAL 28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	LOW POWER P8	P7	P6	P5	P4	P3	P2	P1
7-1892903-3	D	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	RM	RM	RM	RM	RM	RM	RM	RM
	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E								
	B	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E								
	A	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E								

8P + 112S

PART NUMBER	ROWS	POWER P8	P7	P6	P5	SIGNAL 8	7	6	5	4	3	2	1	POWER P4	P3	P2	P1
7-1892903-4	D	RM	RA	RM	RA	E	E	E	E	E	E	E	E	RA	RM	RA	RM
	C					E	E	E	E	E	E	E	E				
	B					E	E	E	E	E	E	E	E				
	A					E	E	E	E	E	E	E	E				

4P + 32S + 4P

F19

PART NUMBER	ROWS	SIGNAL 16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	POWER LP2	LP1
8-1892903-3	D	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	LP	LP
	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	B	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	A	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		

2LP + 64S

PART NUMBER	ROWS	POWER P2	SIGNAL 7	6	5	4	3	2	1	POWER P1
7-1892903-5	D	RM	E	E	E	E	E	E	E	RM
	C		E	E	E	E	E	E	E	
	B		E	E	E	E	E	E	E	
	A		E	E	E	E	E	E	E	

1ACP + 28S + 1ACP

PART NUMBER	ROWS	POWER P6	P5	P4	SIGNAL 10	9	8	7	6	5	4	3	2	1	POWER P3	P2	P1
7-1892903-6	D	RM	RM	RM	E	E	E	E	E	E	E	E	E	E	RM	RM	RM
	C				E	E	E	E	E	E	E	E	E	E			
	B				E	E	E	E	E	E	E	E	E	E			
	A				E	E	E	E	E	E	E	E	E	E			

3ACP + 40S + 3ACP

PART NUMBER	ROWS	SIG 1	POWER P2	P1
7-1892903-8	D	-	RM	RM
	C	-		
	B	E		
	A	E		

2ACP + 2S

PART NUMBER	ROWS	SIG 3	2	1	POWER P2	P1
8-1892903-0	D	E	E	E	RM	RM
	C	E	E	E		
	B	E	E	E		
	A	E	E	E		

2P + 12S

PART NUMBER	ROWS	SIGNAL 5	4	3	2	1	POWER P5	P4	P3	P2	P1
8-1892903-1	D	E	E	E	E	E	RM	RM	RM	RM	RM
	C	E	E	E	E	E					
	B	E	E	E	E	E					
	A	E	E	E	E	E					

5ACP + 20S

PART NUMBER	ROWS	POWER P8	P7	P6	P5	SIGNAL 12	11	10	9	8	7	6	5	4	3	2	1	POWER P4	P3	P2	P1
8-1892903-2	D	RM	RA	RM	RA	E	E	E	E	E	E	E	E	E	E	E	E	RA	RM	RA	RM
	C					E	E	E	E	E	E	E	E	E	E	E	E				
	B					E	E	E	E	E	E	E	E	E	E	E	E				
	A					E	E	E	E	E	E	E	E	E	E	E	E				

4P + 48S + 4P

F18

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°

MATERIAL - -
FINISH - -

DWN C ZHOU 09JUN2009
CHK S ZHAO 09JUN2009
APVD -
PRODUCT SPEC 108-2157
APPLICATION SPEC 114-13112
WEIGHT -

TE Connectivity

NAME PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES MULTI-BEAM XLE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1892903	-

CUSTOMER DRAWING SCALE 4:1 SHEET 10 OF 10 REV F19