66566-1 ✔ ACTIVE


AMP | AMP Type III+, Circular Plastic Connectors Series 1


TE Internal #: 66566-1

Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+

View on TE.com >

Connectors > Contacts > Connector Contacts

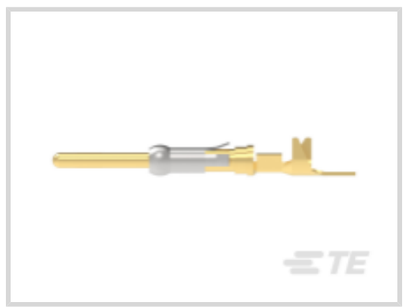

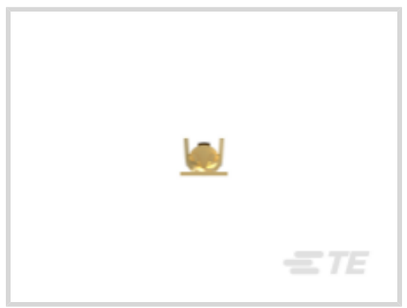
Contact Type: **Pin**

Contact Mating Area Plating Material: **Precious Metal**

Wire Contact Termination Area Plating Material: **Gold**

Contact Retention Within Housing: **With**

Contact Size: **Size 16**

Features

Contact Features

Contact Type	Pin
Contact Mating Area Plating Material	Precious Metal
Wire Contact Termination Area Plating Material	Gold
Contact Retention Within Housing	With
Contact Size	Size 16
Contact Base Material	Brass
Contact Current Rating (Max)	13 A
Mating Pin Diameter	1.57 mm[.062 in]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Mating Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Material Thickness	.25 µm[10 µin]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel

Contact Underplating Material Thickness	1.27 µm[50 µin]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With

Dimensions

Wire Size	.2 – .6 mm²
Compatible Insulation Diameter Range	1.52 – 3.05 mm[.06 – .12 in]

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]

Operation/Application

Circuit Application	Power & Signal

Packaging Features

Packaging Quantity	1000
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 200893-2
INSERTION TOOL CONT



TE Part # 539972-1
EXTRACTION TOOL



TE Part # 305183
EXTRACT TOOL TYPE 2 20-16



TE Part # 91542-1
CCII TYPE III+ PIN SKT 24-22 ASSY

Also in the Series | AMP Type III+



Connector Contacts(260)




Insertion & Extraction Tools(4)



Power Contacts(260)

Also in the Series | Circular Plastic Connectors Series 1

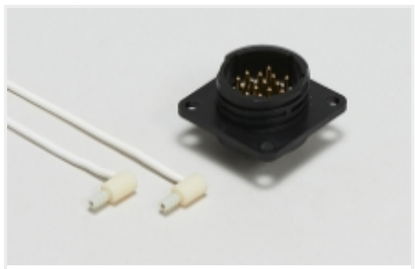

Circular Power Connectors(211)




Connector Contacts(260)



Power Contacts(260)


Customers Also Bought

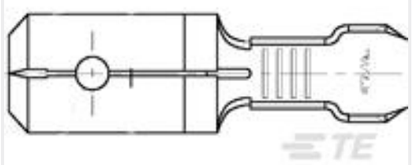


TE Part #42475-2
250 FASTON TAB 22-18 AWG TPBR




TE Part #63971-1
250 FASTON TAB TPBR

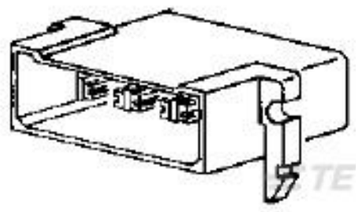


TE Part #163008
FF 250 TAB HSG 8P NYLON CLEAR




TE Part #521766-1
250 HSG. PL MKIII REC. 10mm 2P NAT



TE Part #794954-4
4P RCPT VAL-U-LOK V2

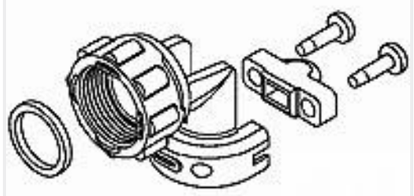


TE Part #796382-2
R/A STRN RELIEF KIT,SZ 23,CPC

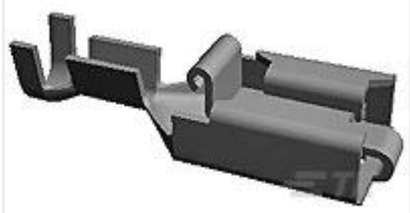


TE Part #928960-7
PL 250 REC TERMINAL 11-10 AWG PTPB



TE Part #1-1375820-4
CST-100 II HOUSING 14 POS



TE Part #1658686-4
SOCKET CONTACT,22 DF,LP,22-28

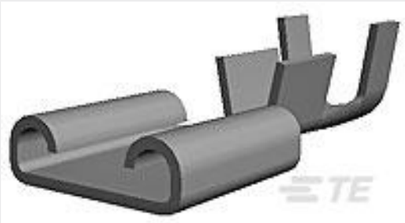

TE Part #1-160305-6
250 FASTON,REC.,10-12 AWG,TPBR

Documents

Product Drawings

III+ PIN,24-20,30AU>10,LP

English

CAD Files

Customer View Model

ENG_CVM_CVM_66566-1_K.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66566-1_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66566-1_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English