
This document was generated on 02/18/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 1731090157
Status: Active
Overview: FCT D-Sub Connectors
Description: FCT Standard-Density D-Sub Connector, Male, Straight, PCB Through Hole, Gold Plating, 50 Mating Cycles, 6.60mm Snap-in Bolt, 15 Circuits

Documents:
Datasheet (PDF)
RoHS Certificate of Compliance (PDF)

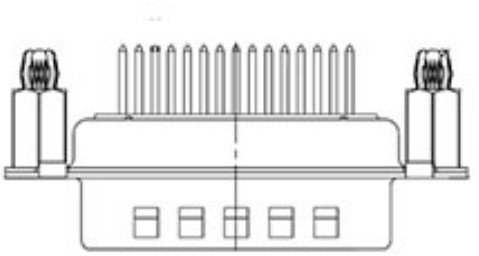

Series image - Reference only

EU ELV
Not Reviewed

EU RoHS
Not Reviewed

China RoHS

REACH SVHC
Not Reviewed

Halogen-Free Status
Not Reviewed

For more information, please visit Contact US

China ROHS	Not Reviewed
ELV	Not Reviewed
RoHS Phthalates	Not Reviewed

Search Parts in this Series
173109 Series

Mates With
FCT Standard-Density D-Sub, Size 2, 15 Position, Socket

General

Product Family	D-Sub Products
Series	173109
IP Rating	IP20
Overview	FCT D-Sub Connectors
Product Category	D-Sub Connector
Product Name	FCT Products
Type	Standard Density
UPC	889056486392

Physical

Circuits (Loaded)	15
Circuits (maximum)	15
Color - Resin	White
Durability (mating cycles max)	50
Gender	Male
Material - Contact	Copper Alloy
Material - Resin	PBT
Material - Shell	Steel
Net Weight	8.700/g
Number of Rows	2
Orientation	Straight
PC Tail Length	10.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Carton
Panel Mount	Rear
Panel Mount Method	Thread-In
Pitch - Mating Interface	2.84mm
Pitch - Termination Interface	2.84mm
Plating - Contact	Gold over Nickel
Plating - Shell	Tin
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Shielded	Yes
Temperature Range - Operating	-55° to +125°C
Termination Style	Through Hole
Waterproof / Dustproof	No
Waterproof / Dustproof Type	IP20

Electrical

Current - Maximum per Contact	7.5A

Material Info

Engineering Number	F15P1G3-0982

This document was generated on 02/18/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION