REVISION R

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE DECIMALS ±.1	THREE PLACE DECIMALS ± .005	ANGLES ± 2°
TWO PLACE DECIMALS ±.01	FOUR PLACE DECIMALS ± .0020	

TITLE: .100 x .100 C.L. DOUBLE ROW SURFACE MOUNT SOCKET ASSEMBLY

DWG NO: SSF-1XX-XX-XX-D-XX
SHEET 1 OF 1

SSF-1XX-XX-XX-D-XX


No. OF POSITIONS PER ROW
-02 THRU 36

LEAD STYLE
-01: THROUGH HOLE (SEE FIG.2) (USE C-44-01-XX)
-02 SURFACE MOUNT (SEE FIG.1) (USE C-44-02-XX)
-L1: THROUGH HOLE (SEE FIG.2) (USE C-61-01-XX)
-L2 SURFACE MOUNT (SEE FIG.1) (USE C-61-02-XX)

ROW SPECIFICATION
-D: DOUBLE

PLATING SPECIFICATION
-L: 10µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE C-XX-XX-L)
-S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE C-XX-XX-S)
-F: 3µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE C-XX-XX-F)
-LM: 10µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE C-XX-XX-L)
-SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE C-XX-XX-S)
-FM: 3µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE C-XX-XX-F)

OPTION
LEAVE BLANK FOR NO OPTION
-LC: LOCKING CLIP (USE 2 LC-05-TM SEE NOTE 4)
(N/A ON LEAD STYLES -01 OR -L1)

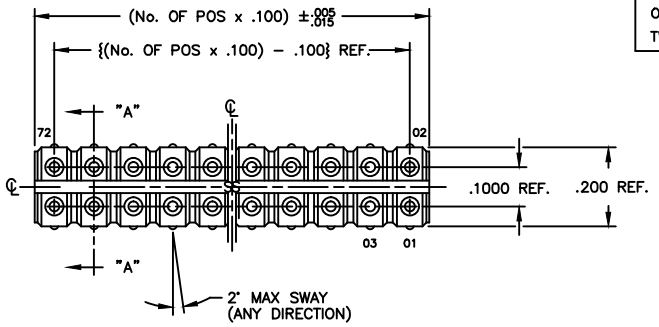



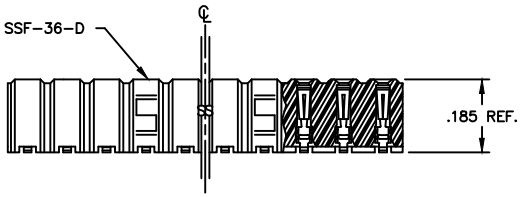


FIGURE 1
-02

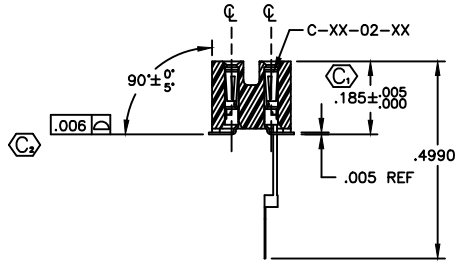


SECT."A"-"A"
(IN-PROCESS VIEW)

PACKAGING

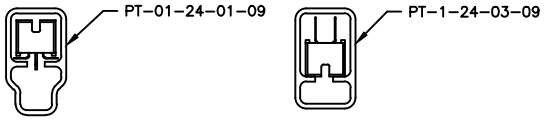

OPTIONS	PACKAGING TUBE	PLUG
-X1	PT-1-24-03-09	TP-03
-X2, -X2-LC	PT-1-24-01-09	TP-24

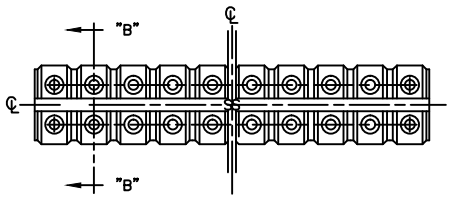

DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1



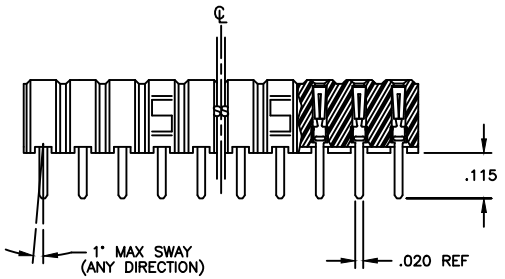


FIGURE 2
-01



SECT."B"-"B"
(IN-PROCESS VIEW)

DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1.

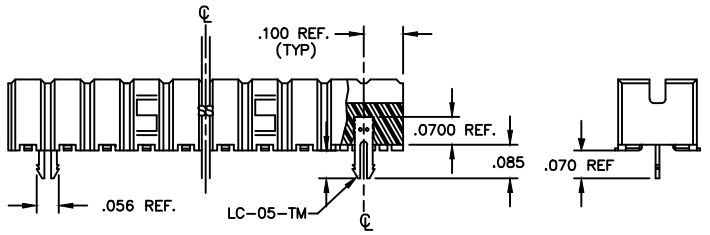

LOCKING CLIP OPTION
CLIPS AVAILABLE IN -2 THRU -36 POSITIONS.
(SEE NOTE 4)
[N/A ON LEAD STYLES -01 OR -L1]

MISC\MKTG
SSF-1XX-XX-X-D-X-XX-MKT

NOTES:
1.) MINIMUM PUSH OUT FORCE: .5 lbs.
2.) COPLANARITY TO BE .006 MAX.
3.) Ⓒ REPRESENTS A CRITICAL DIMENSION
4.) ONLY ONE LOCKING CLIP ON -2 POS.
5.) BODY MATERIAL: BLACK PBT
6.) CONTACT: BERYLLIUM COPPER

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

samtec
520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: REIDINGER 7-10-91
CHECKED BY: ECKERT
APPROVAL PAE

SSF-1XX-XX-XX-D-XX
SHEET 1 OF 1