

PRODUCT N°	NBR OF CONTACTS	POLARIZING PLUG		DIM"C"	DIM"D"	CONTACT PLACED IN CAVITY (TABLE ACCORDING WITH VIEW "A") 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18
89852-Y01LF	12		TOP TER.	27.94	30.40	X X X X X X X X X X X X
	11	WITHOUT	BOTTOM TER.			X X X X X X X X X X X
89852-Y02LF	12		TOP TER.	27.94	30.40	X X X X X X X X X X X X
	11	65307-001 ○	BOTTOM TER.			X X X X X X X X X X X ○
89852-Y03LF	13	WITHOUT	TOP TER.	43.18	45.64	X X X X X X X X X X X X X X X X X
	13	WITHOUT	BOTTOM TER.			X X X X X X X X X X X X X X X X X
89852-Y04LF	5		TOP TER.	10.16	12.62	X X X X X
	4	WITHOUT	BOTTOM TER.			X X X X

RoHS COMPATIBLE, SEE NOTE 4

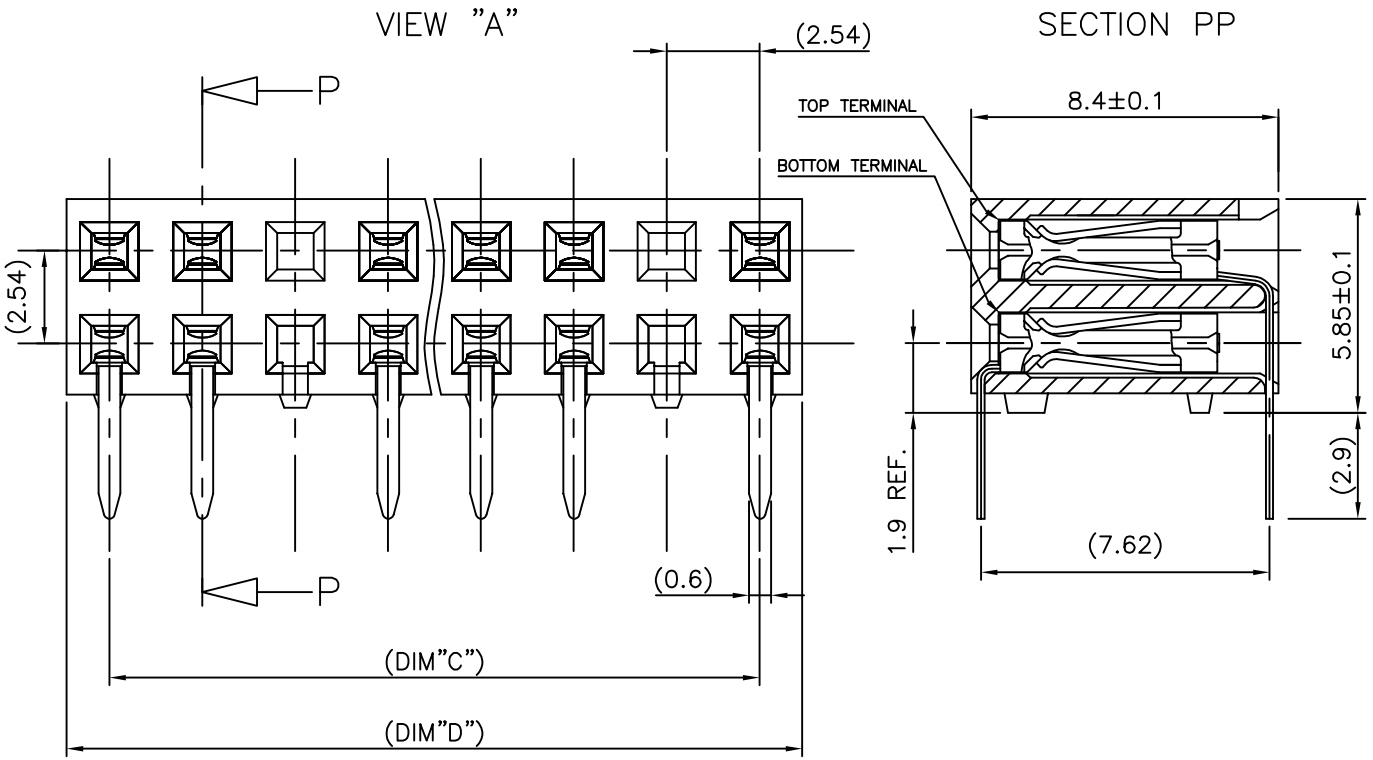

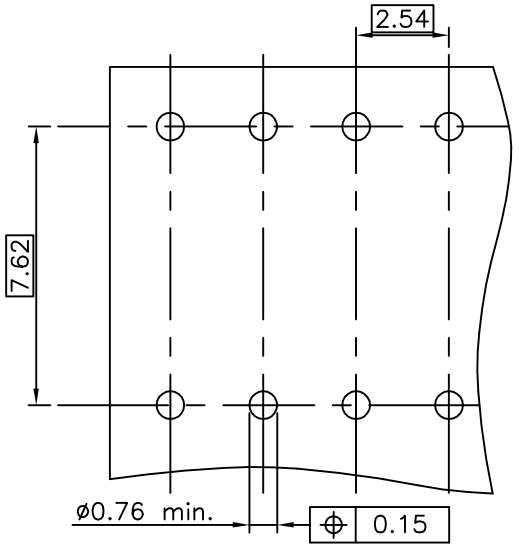

RECOMMENDED HOLE PATTERN

NOTES:

1 – MATERIAL HOUSING: THERMOPLASTIC POLYESTER, 30% GLASS FILLED, COLOUR BLUE. FLAME RETARDANT PER UL-94 CATEGORY V0.

2 – MATERIAL TERMINAL: PHOSPHOR BRONZE.

3 – TERMINALS CAN ONLY BE USED FOR P.C. BOARD . APPLICATION WITH THROUGH HOLES.

4 – RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a – PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.

b – MANUFACTURING PROCESS COMPATIBILITY
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.

c – LABELING:
- MEETS PACKAGING SPECS AS PER GS-14-920

d – LEGAL STATEMENT: SEE GS-47-0004

89852-4XXLF	Sn	Sn
89852-3XXLF	0.76µm GOLD	Sn
PLATING CODE	CONTACT AREA	SOLDER TAIL
	PLATING THICKNESS OVER 1.27µm Ni MIN	

ltr	ecn no	dr	date
K	B-20026	BVE	15.01.20
L	B-20689	BVE	15.04.15
F	F04-0366	DLE	04.11.08
G	F06-0204	DLE	06.06.21
H	F07-0271	LMU	07.12.06
J	B-19123	LMU	14.10.21

mat'l. code: SEE NOTES
surface: ISO 1302
tolerance: ISO 406 ISO 1101
tolerances unless otherwise specified: angles ±2°, linear ±0.3
projection
mm
scale10/1
dr P.NIZZI 96.09.24
engr JM PHAMVAN 96.09.24
chr P.NIZZI 96.09.24
appd JMP 96.09.24
sheet index | revision sheet

product family: DUBOX
title: DUBOX HCC SELECTED LOADED
dwg no 89852 | sheet 1 of 1 | size A2
type customer Drawing

Copyright FCI
FCIconnect.com
form: A2